

April 1, 1998

Mr. Doug Joseph
Wisconsin Department of Natural Resources
1300 West Clairemont Avenue
P.O. Box 4001
Eau Claire, Wisconsin 54702-4001

RECEIVED

APR - 3 1998

DNR - WD

**Re: Site Investigation Work Plan
Tarco South Property
2100 East Avenue North, Onalaska, Wisconsin 54650
WDNR ID # 02-32-000209**

Dear Mr. Joseph:

This Site Investigation Work Plan (SIWP) constitutes a plan proposed by Fluid Management (FMI), for the investigation of potential soil and/or groundwater contamination originating from waste disposal at the Tarco South Property in Onalaska, Wisconsin. Further details regarding FMI's sampling techniques and methodologies are described in FMI's standard operating procedures (SOP), which are available upon request. A health and safety plan has been assembled for the site in accordance with Occupational Safety and Health Administration (OSHA) regulations and is available upon request from FMI.

Site Description and History

The Tarco South Property site is divided by U.S. Highway 53 and is comprised of two separate parcels as follows: approximately 5.82 acres located at 2100 East Avenue North in the city of Onalaska (east property), and approximately 18.48 acres located in the town of Onalaska (west property). Both parcels are in the SW $\frac{1}{4}$ SE $\frac{1}{4}$, Section 29, T17N, R7W, in La Crosse County. Figure 1 illustrates the site location. The property is surrounded by residential areas to the north and west. East Avenue North and a residential area lie to the east. The property to the south is owned by L.B. White Company. The area surrounding the Tarco Property South site is mainly residential. Figure 2 illustrates the site plan view.

Several previous environmental assessments have been completed for the east property and are summarized as follows:

- A Phase One/Phase Two Environmental Assessment was previously prepared by ACG Associates of Tomah, Wisconsin.
- A Phase I Environmental Site Assessment was performed by Midwest Environmental Management Company (MEMCO) during June 1997.
- A Phase II Environmental Site Assessment was conducted by Midwest Environmental on June 30-July 2, 1997. Soil and groundwater samples were collected with a Geoprobe. Geoprobe locations are shown on Figure 3. Soil samples submitted for laboratory analysis did not display detectable concentrations of contaminants. Soil sample laboratory analytical results are summarized in Table 1. Groundwater samples submitted for laboratory analysis displayed concentrations of trichloroethane above NR 140 Enforcement Standards. Groundwater laboratory analytical results are summarized in Table 2.

Regional and Local Geology & Hydrogeology

The site is situated approximately 0.6 miles east of Lake Onalaska and 0.5 miles west of the Mississippi River bluffs. The site is located at an elevation of approximately 710 feet above mean sea level (MSL) (United States Geological Survey [USGS] 1993).

Bedrock in the area is composed of Cambrian-age sandstones, consisting of the Trempealeau, Tunnel City, and Elk Mound Groups (Mudrey, Brown, and Greenberg 1982). Based on information obtained from well construction reports in the area, sandstone bedrock is anticipated to be located at approximately 185 feet below ground surface (bgs) (Wisconsin Geological and Natural History Survey [WGNHS] n.d.). Soils at the site are anticipated to consist of fine-medium grained sands and gravels (WGNHS n.d. and MEMCO 1997).

Groundwater was encountered at depths of approximately 70-76 feet bgs in the borings advanced by MEMCO. Based on well logs and topography, groundwater is expected to be encountered at a depth ranging from approximately 70-90 feet bgs across the site. Based on a review of the USGS topographic map, and information from the L.B. White site, local groundwater flow is anticipated to be to the southwest toward the Black River.

Local Contaminant Pathways and Receptors

Site underground utilities include telephone and electric. Figure 4 shows the locations of the site utilities.

The area of the site is not served by municipal water. The WGNHS was contacted regarding the presence of potable wells within a 1,200-foot radius of the site. According to well logs, there are at least 34 registered private potable wells located within 1,200 feet of the site. Most of the wells are located adjacent to the eastern parcel and are approximately 100-150 feet deep, with 3-5 foot screened sections (WGNHS n.d). WGNHS well logs are included as Appendix A. There are also two unregistered potable wells located on the property (as shown in Figure 2). During the site investigation, FMI will evaluate whether any private potable wells are at risk from potential groundwater contamination.

There are no wetlands located on or immediately adjacent to the site (USGS 1993). Based on available information, there are no sensitive ecosystems or habitats and no state or federally listed endangered species on or adjacent to the site. The nearest surface water body that could potentially be affected by contamination is Lake Onalaska, located approximately 0.6 miles west of the site.

Based on a review of the National Register of Historic Places and State Register of Historic Places in Wisconsin, there are no historical or archeological sites on or adjacent to the site (State Historical Society of Wisconsin 1994). Based on a review of NR 102.10 and NR 102.11, there are no outstanding resource waters or exceptional resource waters on or near the site (WDNR 1993a).

Local Contaminant Sources Assessment

To locate potential contaminant sources that exist within a 1,200-foot-radius of the site, FMI has reviewed the following public-record lists:

- Hazard Ranking List (WDNR 1994)
- Wisconsin Remedial Response Site Evaluation Report (WDNR 1995a)
- Spills Summary Report (WDNR 1995b)
- Registry of Waste Disposal Sites in Wisconsin (WDNR 1993b)
- Comprehensive Environmental Response, Compensation and Liability Information System (CERCLIS) List (Environmental Protection Agency [EPA] 1994a)
- List of Active Leaking Underground Storage Tank Sites (WDNR 1996)

- Superfund: Progress at National Priority List Sites: Wisconsin (EPA 1994b)

The only site located during the information search is the L.B. White Company. A release of chlorinated solvents was documented at the site. After completion of an investigation, the site was closed by the WDNR.

Soil Investigation

The proposed soil investigation at the Tarco South Property site will consist of the following activities:

- Advance two test borings to a maximum depth of approximately 80 feet bgs. These borings will be advanced in areas of observed surface staining, as discussed in our March 17, 1998 site meeting. The borings will be continuously sampled to a depth of 20 feet bgs, sampled at 5-foot intervals from 20-40 feet bgs, and sampled at 10-foot intervals from 40-80 feet bgs. If no indications of contamination are present based on field screening (PID, odors, and staining), these borings may be terminated at a minimum depth of 20 feet bgs. If field screening indicates soil contamination, the borings will be advanced until a sample exhibiting no field indications of contamination is collected at least five feet below the last sample exhibiting field indications of contamination. However, at least one of the two borings will be advanced to the groundwater table. Proposed test boring locations are shown on Figure 5. Four soil samples (two from each boring) will be submitted to a state-certified laboratory for analysis of volatile organic compounds (VOCs) and semi-volatile organic compounds (SVOCs). One surficial soil sample from each boring will be submitted to a state-certified laboratory for analysis of RCRA metals.
- Advance four test borings (which will be completed as groundwater monitoring wells) to depths of approximately 80 feet bgs. These borings will be continuously sampled to 10 feet bgs and at 10-foot intervals thereafter to completion of the boring. Monitoring well locations are shown on Figure 5. Four soil samples (one from each boring) will be submitted to a state-certified laboratory for analysis of VOCs and SVOCs.
- Field-screen samples with a portable photoionization detector (PID).
- Classify soil samples using physical descriptions and the Unified Soil Classification System (USCS).

- Prepare boring logs indicating sample interval depths, observations, locations of various strata, saturation conditions, and other geologic information.

Groundwater Investigation

The proposed groundwater investigation will consist of the following activities:

- Installation of four groundwater monitoring wells (as shown in Figure 5).
- Measure the depth to groundwater in each of the monitoring wells.
- Monitoring well development.
- Sample the wells for VOCs and SVOCs. Two rounds of sampling will be performed a minimum of two months apart.
- Survey the well locations and top of casing elevations.
- Determine the groundwater flow direction and hydraulic gradient.
- Free product assessment - if free product is detected in a well, product thickness will be determined using a product interface probe.

Report Preparation

Following the conclusion of the field activities, a brief report will be prepared that contains a summary of soil and groundwater data; results; conclusions; and recommendations. The report will be prepared under the direction of a certified hydrogeologist as defined by Chapter NR 712.03(1) of the Wisconsin Administrative Code (WAC) and submitted to the WDNR.

Certification

This Site Investigation Work Plan has been prepared by FLUID MANAGEMENT, A DIVISION OF ENVIROGEN, INC., in accordance with generally accepted engineering and hydrogeologic principles and practices of this time and location. The recommended scope of services presented herein has been developed from consideration of the project characteristics and interpretation of available information. Because only limited information is available, FMI reserves the right to modify actual site activities based on subsequent findings. The locations of the soil borings have been selected to delineate the extent of contamination. If the contamination is found to be more or less than originally anticipated, appropriate modifications to the Site Investigation Work Plan may be necessary.

I, Ted R. Hubbes, hereby certify that I am a hydrogeologist as that term is defined in section NR 712.03(1), Wis. Adm. Code, and that, to the best of my knowledge, all of the information contained in this document is correct and the document was prepared in compliance with all applicable requirements in chapters NR 700 to 726, WAC.



Ted R. Hubbes, P.G.
Senior Hydrogeologist

c: Mr. Bob Tooke

- EPA 1994a. Comprehensive Environmental Response, Compensation and Liability Information System (CERCLIS) List. Version 4.02.
- EPA 1994b. Office of Superfund, Waste Management Division. Region 5. Superfund: Progress at National Priority List Sites. Wisconsin 1994 Update. Chicago, Illinois.
- MEMCO 1997. Phase II Environmental Site Assessment Report. Midwest Environmental Management Company, La Crosse, Wisconsin.
- Mudrey, M. G., B. A. Brown, and J. K. Greenberg 1982. University of Wisconsin-Extension. Geological and Natural History Survey. Bedrock Geologic Map of Wisconsin. Map scale: 1:1,000,000. Madison, Wisconsin.
- State Historical Society of Wisconsin 1994. Division of Historic Preservation. National Register of Historic Places and State Register of Historic Places in Wisconsin. Madison, Wisconsin.
- USGS 1993. Onalaska Quadrangle. Wisconsin Map. 7.5 Minute Series. Map Scale: 1:24,000.
- WDNR 1993a. Wisconsin Administrative Code. Chapter NR 102.10 Outstanding resource waters and chapter NR 102.11 Exceptional resource waters. Register No. 449.
- WDNR 1993b. Wisconsin Emergency and Remedial Response Program. Registry of Waste Disposal Sites in Wisconsin. PUBL-SW-108-93. Update. Madison, Wisconsin.
- WDNR 1994. Wisconsin Emergency and Remedial Response Program. Hazard Ranking List. PUBL-SW-501-94 (Rev). Madison, Wisconsin.
- WDNR 1995a. Wisconsin Emergency and Remedial Response Program. Wisconsin Remedial Response Site Evaluation Report. PUBL-SW-504-95 (Rev). Madison, Wisconsin.
- WDNR 1995b. Spills Summary Report.
- WDNR 1996. Bureau of Solid and Hazardous Waste Management. Emergency and Remedial Response Section. Leaking Underground Storage Tank List. Madison, Wisconsin.
- WGNHS n.d. Well Constructor's Reports and Geologic Logs. For wells within a 1,200 foot radius of the Tarco South Property site. University of Wisconsin-Extension. Madison, Wisconsin.


LIST OF FIGURES

- 1 Site Location Map
- 2 Site Plan View
- 3 Phase II Environmental Site Assessment Geoprobe Locations
- 4 Site Utility Locations
- 5 Proposed Test Boring/Monitoring Well Locations

LIST OF TABLES


- 1 Phase II Environmental Site Assessment Soil Sample Laboratory Analytical Results
- 2 Phase II Environmental Site Assessment Groundwater Laboratory Analytical Results

DRAWING NO. 96.763W1
 DRAWN BY: RRT
 CHECKED BY: KMS
 APPROVED BY: RCH
 3/11/98
 4/1/98
 4-1-98

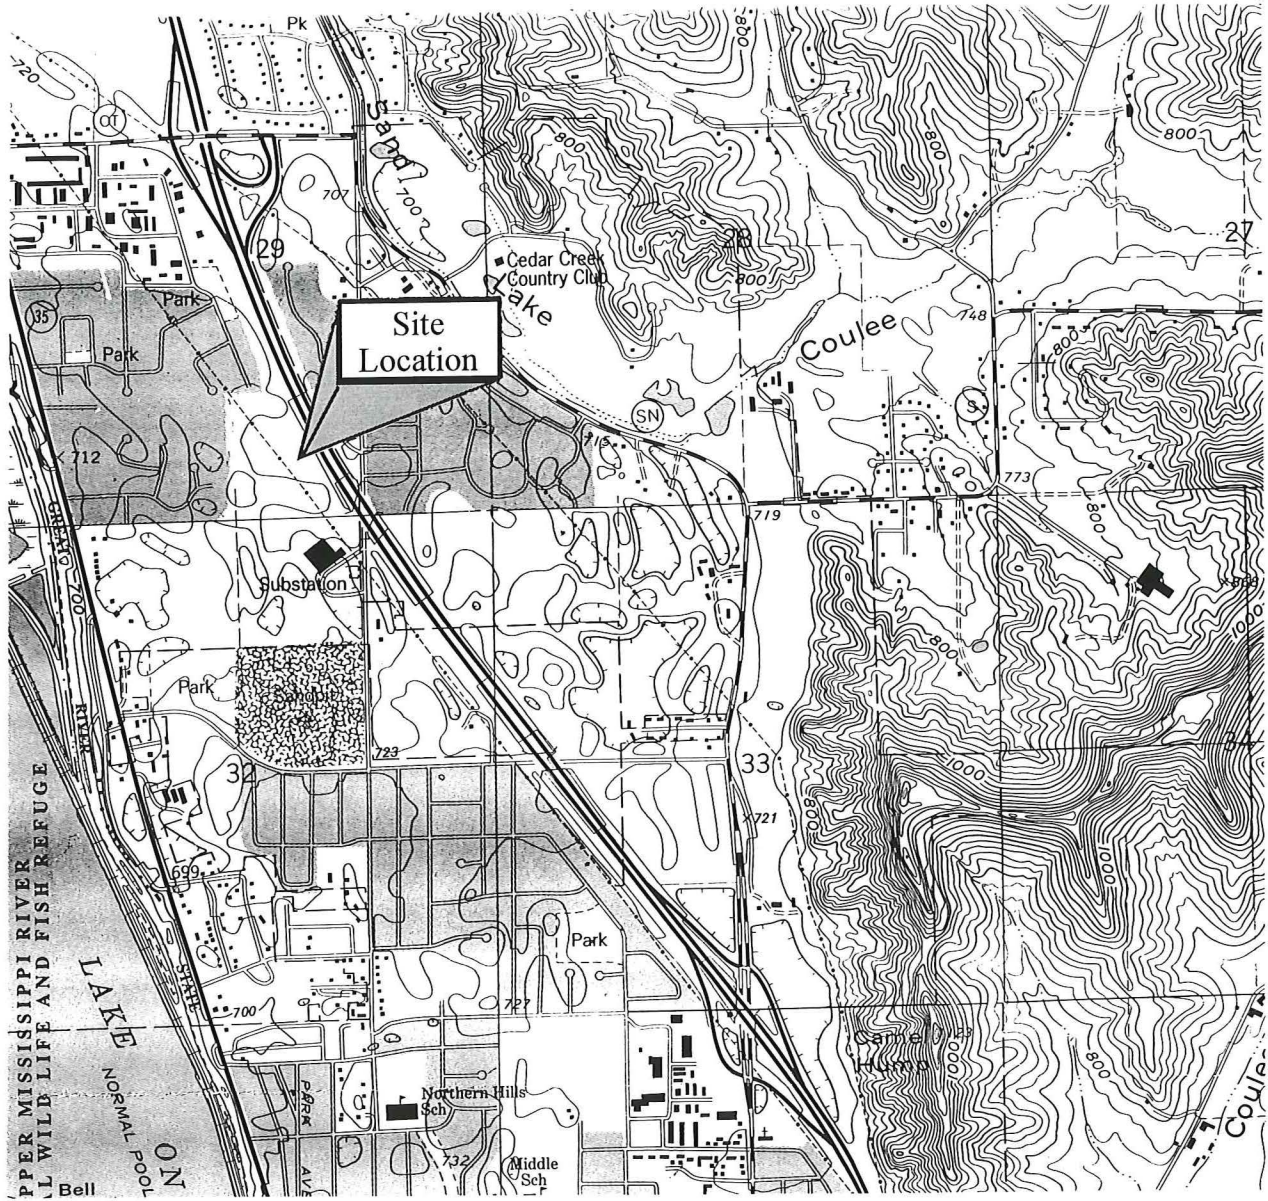

(USGS 1993)

SCALE
1:24000

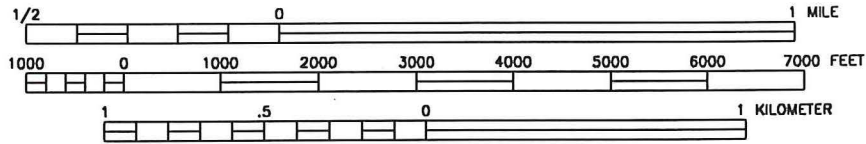

CONTOUR INTERVAL 20 FEET



Site Location Map
Tarco South Property Site
Onalaska, Wisconsin



FIGURE NO.
1

THE INTERPRETATIONS IN THIS FIGURE ARE BASED ON KNOWN POINTS IN TIME AND SPACE AND ARE INTEGRAL TO A WRITTEN REPORT AND SHOULD BE REVIEWED IN THAT CONTEXT.

DRAWING NO. 96.763W2
 DRAWN BY: RRT
 3/11/98
 CHECKED BY: KMS
 4/1/98
 APPROVED BY: ~~RRT~~
 4/1/98

LEGEND

- — — — — PROPERTY BOUNDARY
- ⊙ WATER SUPPLY WELL

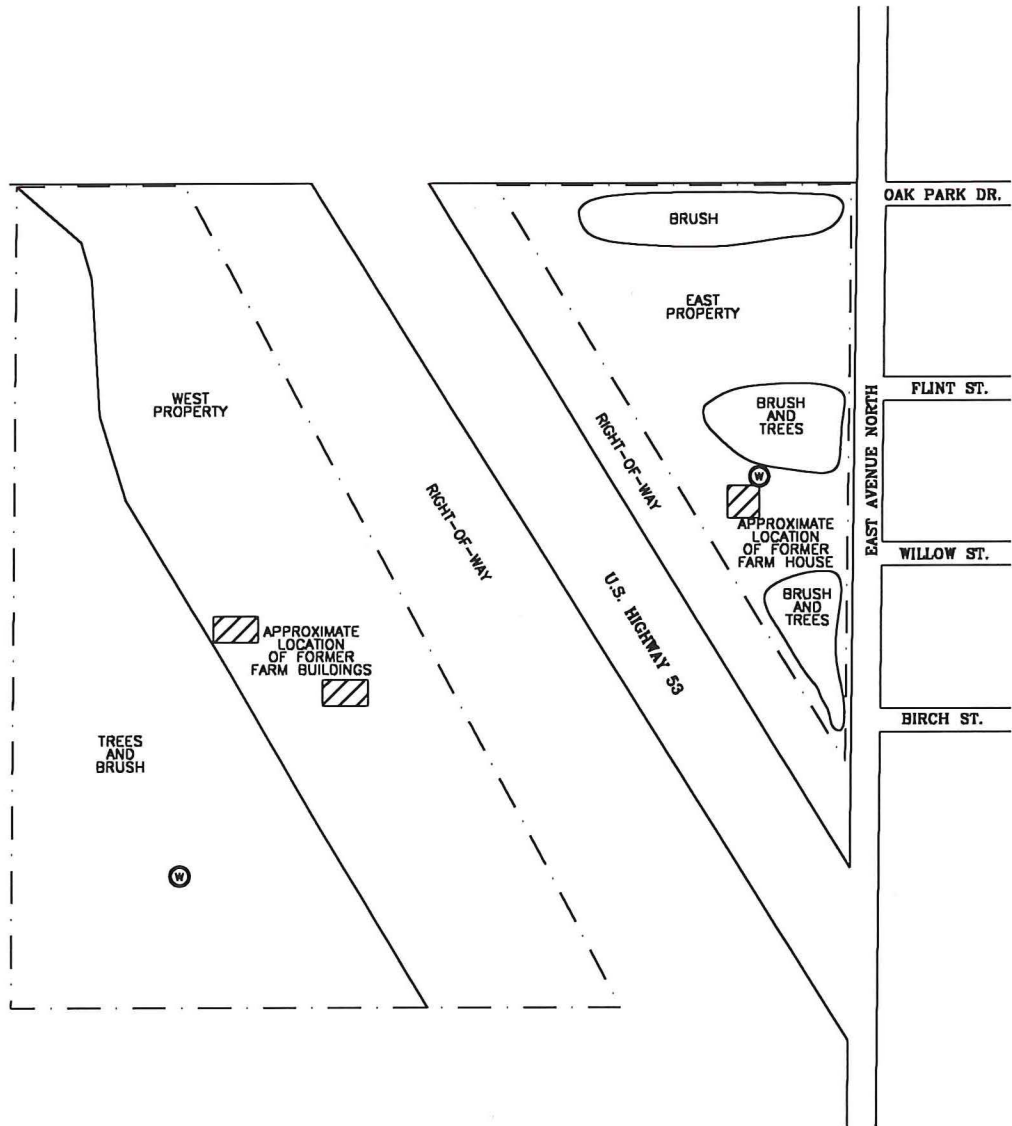

Site Plan View
Tarco South Property Site
Onalaska, Wisconsin




FIGURE NO.
2

THE INTERPRETATIONS IN THIS FIGURE ARE BASED ON KNOWN POINTS IN TIME AND SPACE AND ARE INTEGRAL TO A WRITTEN REPORT AND SHOULD BE REVIEWED IN THAT CONTEXT.

4.1.98

MH

APPROVED BY:

4/1/98

CHECKED BY: KMS

3/11/98

RRT

DRAWN BY:

96.763W3



DRAWING NO.

LEGEND

— — — PROPERTY BOUNDARY

⊙ WATER SUPPLY WELL

● GEOPROBE SAMPLING LOCATION

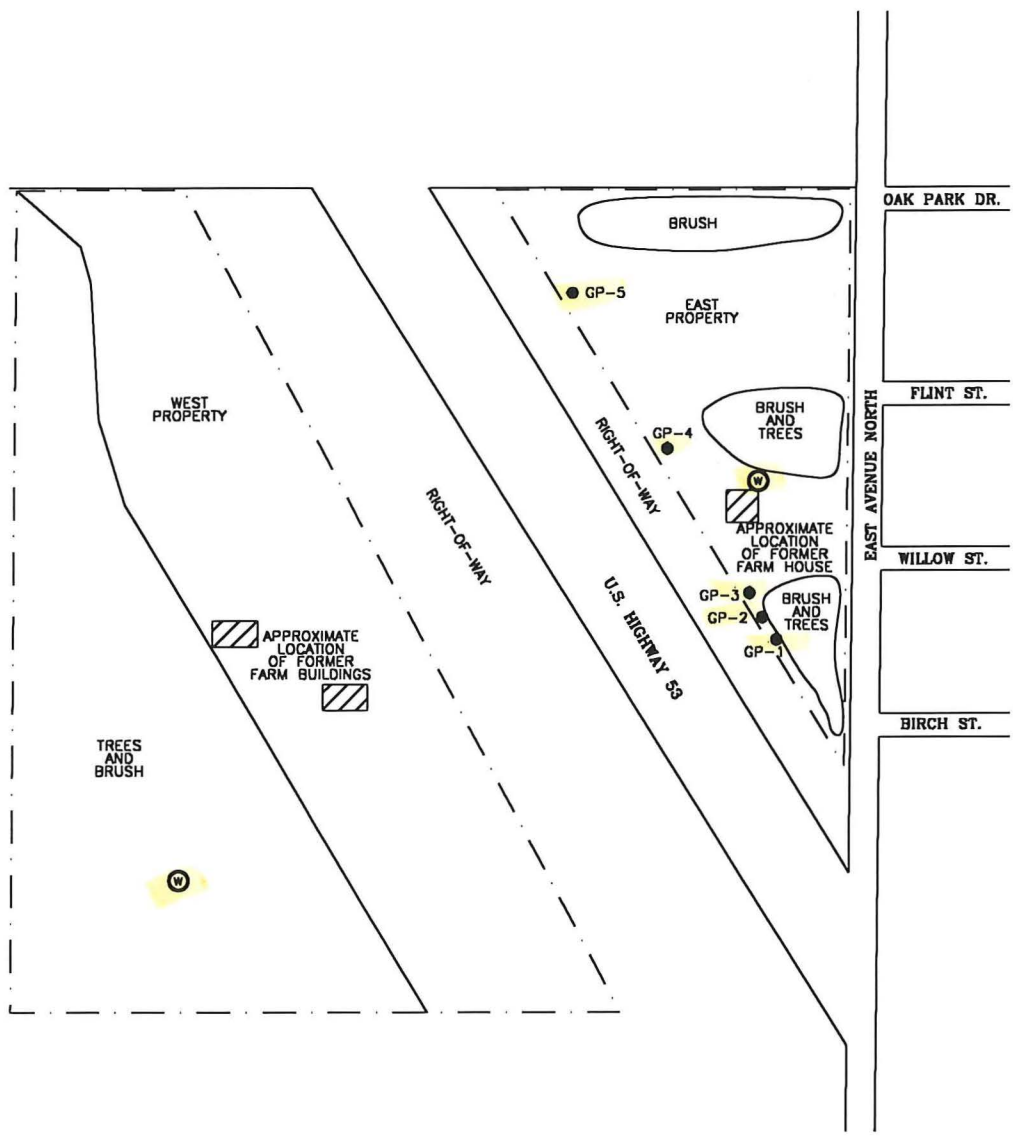

*Phase II Environmental Site
Assessment Geoprobe Locations
Tarco South Property Site
Onalaska, Wisconsin*



FIGURE NO.
3

THE INTERPRETATIONS IN THIS FIGURE ARE BASED ON KNOWN POINTS IN TIME AND SPACE AND ARE INTEGRAL TO A WRITTEN REPORT AND SHOULD BE REVIEWED IN THAT CONTEXT.

DRAWING NO. 96.763W4
 DRAWN BY: RRT
 3/11/98
 CHECKED BY: KMS 4/1/98
 APPROVED BY: TRH 4-1-98

LEGEND

- — — PROPERTY BOUNDARY
- ⊙ WATER SUPPLY WELL
- ⊕ UTILITY POLE
- O — OVERHEAD UTILITY LINE
- UE — UNDERGROUND ELECTRIC
- UT — UNDERGROUND TELEPHONE

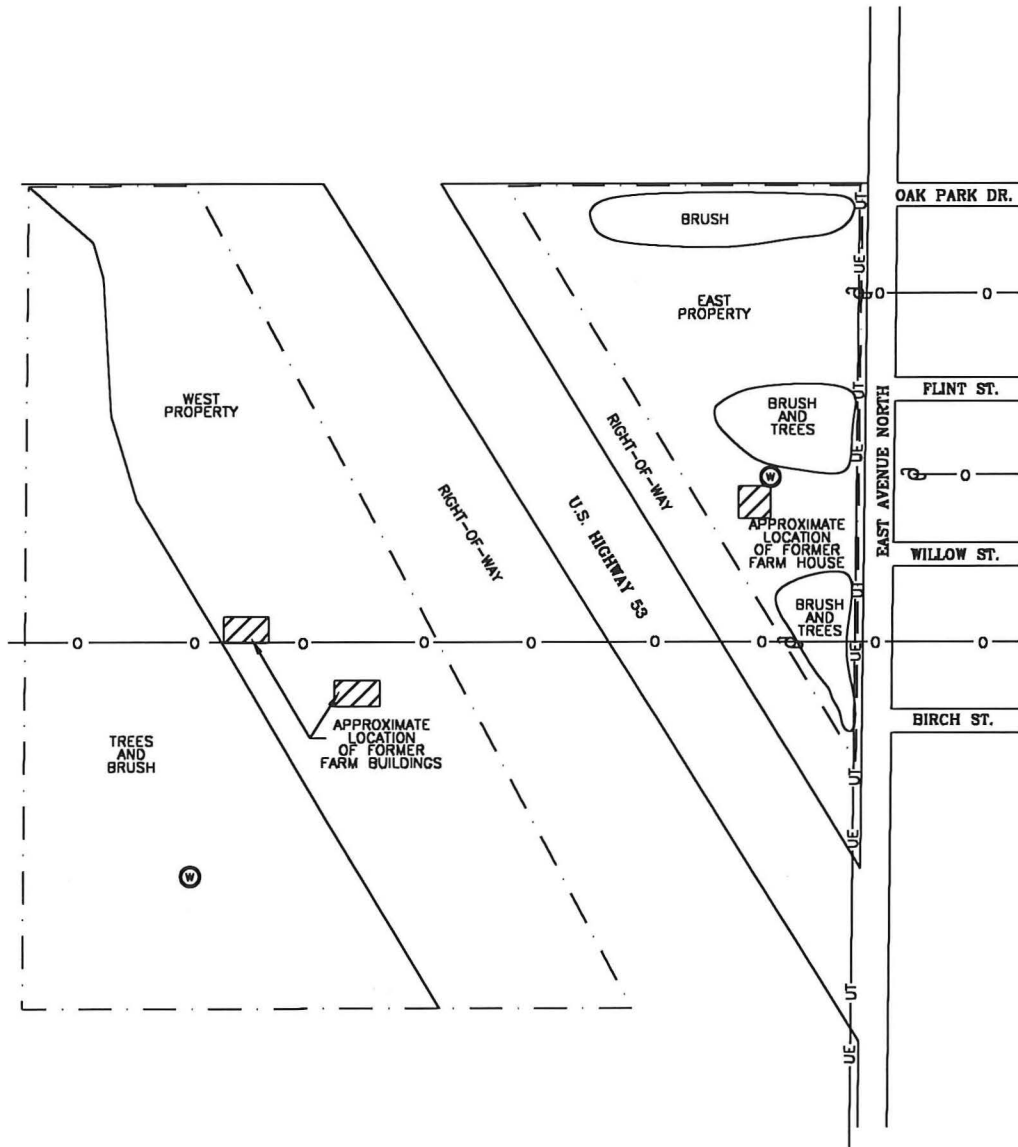

Site Utility Locations
Tarco South Property Site
Onalaska, Wisconsin






FIGURE NO.
4

THE INTERPRETATIONS IN THIS FIGURE ARE BASED ON KNOWN POINTS IN TIME AND SPACE AND ARE INTEGRAL TO A WRITTEN REPORT AND SHOULD BE REVIEWED IN THAT CONTEXT.

DRAWING NO. 96.763W5
 DRAWN BY: RRT
 CHECKED BY: KAS
 APPROVED BY: TRH
 4/1/98
 4-1-98

LEGEND

- — — — — PROPERTY BOUNDARY
- ⊕ WATER SUPPLY WELL
- ⊕ PROPOSED MONITORING WELL
- ⊕ PROPOSED TEST BORING

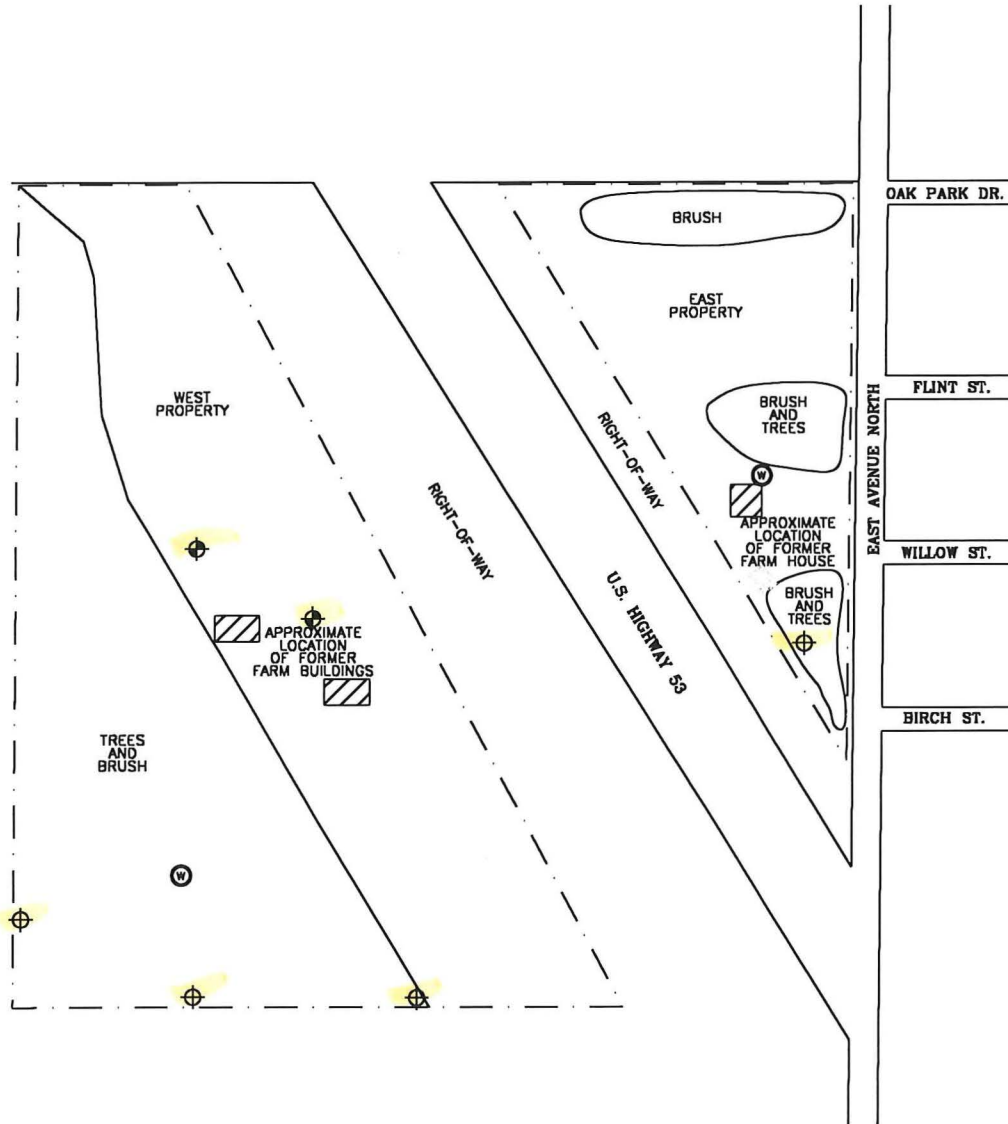

**Test Boring/Monitoring
 Well Location
 Tarco South Property Site
 Onalaska, Wisconsin**




FIGURE NO.
5

THE INTERPRETATIONS IN THIS FIGURE ARE BASED ON KNOWN POINTS IN TIME AND SPACE AND ARE INTEGRAL TO A WRITTEN REPORT AND SHOULD BE REVIEWED IN THAT CONTEXT.

TABLE 1

**Phase II Environmental Site Assessment Soil Sample Laboratory Analytical Results
Tarco South Property
Onalaska, Wisconsin
June 30-July 2, 1997**

Geoprobe	Interval (feet)	FID	VOC List	PCB List	Arsenic (ppm)
P-1	4-6	0	NA	NA	ND
P-1	75-76	0	ND	ND	NA
P-2	4-6	NA	NA	NA	ND
P-3	4-6	NA	NA	NA	ND
P-4	84-85	0	ND	ND	NA
P-5	68-69	0	ND	ND	NA

(Midwest 1997)

Notes: FID: Flameionization detector
VOC: Volatile Organic Compounds
PCB: Polychlorinated Biphenyls
NA: Not analyzed
ND: No detect

Checked by: KMS

Approved by: TRH

TABLE 2

**Phase II Environmental Site Assessment Groundwater
Laboratory Analytical Results
Tarco South Property
Onalaska, Wisconsin
June 30-July 2, 1997**

Geoprobe	Interval (feet)	VOCs	PCBs
P-1	75-79	toluene: 0.37 ppb 1,1,1-trichloroethane: 1.2 ppb trichloroethane: 15 ppb *	ND
P-4	85-89	toluene: 0.40 ppb	ND
P-5	69-73	toluene: 0.36 ppb	ND

(Midwest 1997)

Notes: * Trichloroethane concentration exceeds NR 140 Enforcement Standard.

VOCs: Volatile organic compounds

PCBS: Polychlorinated Biphenyls

ND: No detect

Checked by: KMS

Approved by: TRH

APPENDIX A

WGNHS Well Construction Reports

WELL CONSTRUCTOR'S REPORT
FORM 3300-15

APR 9 1973

STATE OF WISCONSIN
DEPARTMENT OF NATURAL RESOURCES
Box 450
Madison, Wisconsin 53701

NOTE

WHITE COPY - DIVISION'S COPY
GREEN COPY - DRILLER'S COPY
YELLOW COPY - OWNER'S COPY

1. COUNTY La Crosse CHECK ONE Town Village City NAME Owascota

2. LOCATION - 1/4 Section NW Section NE Township 32 Range 17 7W 3. OWNER AT TIME OF DRILLING L. B. White Co

OR - Grid or street no. Street name ADDRESS

AND - If available subdivision name, lot & block no. POST OFFICE Owascota, Wis

4. Distance in feet from well to nearest: (Record answer in appropriate block)

BUILDING	SANITARY SEWER C. I.	SANITARY SEWER TILE	FLOOR DRAIN C. I.	FLOOR DRAIN TILE	FOUNDATION DRAIN SEWER CONNECTED	FOUNDATION DRAIN INDEPENDENT	WASTE WATER DRAIN C. I.	WASTE WATER DRAIN TILE
<u>6'</u>								

CLEAR WATER DRAIN C. I.	CLEAR WATER DRAIN TILE	SEPTIC TANK	PRIVY	SEEPAGE PIT	ABSORPTION FIELD	BARN	SILLO	ABANDONED WELL	SINK HOLE
		<u>100</u>		<u>150'</u>					

OTHER POLLUTION SOURCES (Give description such as dump, quarry, drainage well, stream, pond, lake, etc.)

5. Well is intended to supply water for: Factory

6. DRILLHOLE

Dia. (in.)	From (ft.)	To (ft.)	Dia. (in.)	From (ft.)	To (ft.)
<u>6"</u>	<u>Surface</u>	<u>185'</u>			

9. FORMATIONS

Kind	From (ft.)	To (ft.)
<u>SAND & GRAVEL</u>	<u>Surface</u>	<u>185'</u>

7. CASING, LINER, CURBING, AND SCREEN

Dia. (in.)	Kind and Weight	From (ft.)	To (ft.)
<u>6"</u>	<u>PE. 18.99 BIK</u>	<u>Surface</u>	<u>175'</u>
<u>6"</u>	<u>STAINLESS Well Screen</u>	<u>175</u>	<u>185</u>

10. TYPE OF DRILLING MACHINE USED

Cable Tool Direct Rotary Reverse Rotary

Rotary - air w/drilling mud Rotary - hammer with drilling mud & air Jetting with Air Water

Well construction completed on 4-28 19 71

8. GROUT OR OTHER SEALING MATERIAL

Kind	From (ft.)	To (ft.)
<u>None</u>	<u>Surface</u>	

11. MISCELLANEOUS DATA

Yield test: 4 Hrs. at 25 GPM

Depth from surface to normal water level 76' ft.

Depth to water level when pumping 76' ft.

Well is terminated 12 inches above below final grade

Well disinfected upon completion Yes No

Well sealed watertight upon completion Yes No

Water sample sent to Madison # 9956 laboratory on: April 6 19 73

Your opinion concerning other pollution hazards, information concerning difficulties encountered, and data relating to nearby wells, screens, seals, type of casing joints, method of finishing the well, amount of cement used in grouting, blasting, sub-surface pumprooms, access pits, etc., should be given on reverse side.

SIGNATURE Hubert Shind Registered Well Driller COMPLETE MAIL ADDRESS 914 Adams St

Please do not write in space below

COLIFORM TEST RESULT	GAS - 24 HRS.	GAS - 48 HRS.	CONFIRMED	REMARKS
----------------------	---------------	---------------	-----------	---------

NOTE:

White Copy - Division's Copy
 Green Copy - Driller's Copy
 Yellow Copy - Owner's Copy

DEC 23 1987

1. COUNTY La Crosse CHECK (✓) ONE: Town Village City Malaska Name

2. LOCATION $\frac{1}{4}$ Section or Gov't. Lot NE 1/4 SE 1/4 Section 39 Township 17N Range 7W 3. NAME OWNER AGENT AT TIME OF DRILLING CHECK (✓) ONE Edward Miller Hanson

OR - Grid or Street No. Hanson Road ADDRESS R-1 Holmen

AND - If available subdivision name, lot & block No. POST OFFICE ZIP CODE

4. Distance in feet from well to nearest: (Record answer in appropriate block) Building 7'

Sanitary Bldg. Drain		Sanitary Bldg. Sewer		Floor Drain Connected To:		Storm Bldg. Drain		Storm Bldg. Sewer	
C.I.	Other	C.I.	Other	C.I. Sewer	Other Sewer	C.I.	Other	C.I.	Other

Street Sewer: San. Storm Other C.I. Other

Other Sewers: C.I. Other

Foundation Drain Connected to: Sewer Sewage Sump Clearwater Dr. Clearwater Sump

Sewage Sump: C.I. Other

Clearwater Sump

Septic Tank

Holding Tank

Sewage Absorption Unit: Seepage Pit Seepage Bed Seepage Trench 72

Manure Hopper or Retention or Pneumatic Tank

Privy: Pit: Nonconforming Existing Well Pump Tank

Subsurface Pumphouse: Nonconforming Existing

Barn Gutter

Animal Barn Pen

Animal Yard

Silo With Pit

Glass Lined Storage Facility

Silo w/o Pit

Earthen Silage Storage Trench Or Pit

Earthen Manure Basin

Temporary Manure Stack or Platform

Watertight Liquid Manure Tank or Basin

Manure Pressure Pipe

Subsurface Gasoline or Oil Tank

Waste Pond or Land Disposal Unit (Specify Type)

Manure Storage Basin: Concrete Floor Only Concrete Floor and Partial Concrete Walls

Other (Describe)

5. Well is intended to supply water for: farm

6. DRILLHOLE

Dia. (in.)	From (ft.)	To (ft.)	Dia. (in.)	From (ft.)	To (ft.)	Kind	From (ft.)	To (ft.)
<u>10</u>	<u>Surface</u>	<u>60</u>	<u>6</u>	<u>60</u>	<u>18.3</u>	<u>Clay</u>	<u>Surface</u>	<u>32</u>
						<u>Soft Rock</u>	<u>32</u>	<u>51</u>
						<u>Sand Rock</u>	<u>51</u>	<u>188</u>

7. CASING, LINER, CURBING AND SCREEN

Dia. (in.)	Material, Weight, Specification	Mfg. & Method of Assembly	From (ft.)	To (ft.)
<u>6</u>	<u>Black, plain-end</u>	<u>Jawani .280</u>	<u>Surface</u>	<u>77</u>
	<u>ASMA-120</u>			

8. GROUT OR OTHER SEALING MATERIAL

Kind	From (ft.)	To (ft.)
<u>Cement</u>	<u>Surface</u>	<u>50</u>

10. TYPE OF DRILLING MACHINE USED

Cable Tool Rotary-hammer w/drilling mud & air Jetting with

Rotary-air w/drilling mud Rotary-hammer & air Air

Rotary-w/drilling mud Reverse Rotary Water

11. MISCELLANEOUS DATA

Well construction completed on Nov 16 1987

Yield Test: 8 Hrs. at 10 GPM Well is terminated 15 inches above final grade below

Depth from surface to normal water level 89 Ft. Well disinfected upon completion Yes No

Depth of water level when pumping 102 Ft. Stabilized Yes No Well sealed watertight upon completion Yes No

Water sample sent to La Crosse laboratory on 12/10 1987

Your opinion concerning other pollution hazards, information concerning difficulties encountered, and data relating to nearby wells, screens, seals, method of finishing the well, amount of cement used in grouting, blasting, etc., should be given on reverse side.

Signature Norman Holmen Registered Well Driller Business Name and Complete Mailing Address W5792 State Rd La Crosse, WI. 54601

MAY 07 1974

WELL CONSTRUCTOR'S REPORT
FORM 3300-15

STATE OF WISCONSIN
DEPARTMENT OF NATURAL RESOURCES
Box 450
Madison, Wisconsin 53701



NOTE
WHITE COPY - DIVISION'S COPY
GREEN COPY - DRILLER'S COPY
YELLOW COPY - OWNER'S COPY

1. COUNTY <i>Lacrosse</i>	CHECK ONE <input checked="" type="checkbox"/> Town <input type="checkbox"/> Village <input type="checkbox"/> City	NAME <i>Onalaska</i>
------------------------------	--	-------------------------

2. LOCATION - 1/4 Section <i>Ne 4 Sec 4</i>	Section <i>29</i>	Township <i>T17N</i>	Range <i>R7W</i>	3. OWNER AT TIME OF DRILLING <i>Leo Schubeck</i>
OR - Grid or street no.	Street name	ADDRESS <i>1328 Johnson St Lak</i>		

AND - If available subdivision name, lot & block no.
Schallers oak park

POST OFFICE
Wisc

4. Distance in feet from well to nearest: (Record answer in appropriate block)	BUILDING <i>6</i>	SANITARY SEWER C. I. TILE	FLOOR DRAIN C. I. TILE	FOUNDATION DRAIN SEWER CONNECTED INDEPENDENT	WASTE WATER DRAIN C. I. TILE
---	----------------------	------------------------------	---------------------------	---	---------------------------------

CLEAR WATER DRAIN C. I. TILE	SEPTIC TANK <i>27</i>	PRIVY	SEEPAGE PIT	ABSORPTION FIELD <i>80"</i>	BARN	SILO	ABANDONED WELL	SINK HOLE
---------------------------------	--------------------------	-------	-------------	--------------------------------	------	------	----------------	-----------

OTHER POLLUTION SOURCES (Give description such as dump, quarry, drainage well, stream, pond, lake, etc.)
NONE

5. Well is intended to supply water for:
Home

6. DRILLHOLE						9. FORMATIONS			
Dia. (in.)	From (ft.)	To (ft.)	Dia. (in.)	From (ft.)	To (ft.)	Kind		From (ft.)	To (ft.)
<i>4"</i>	<i>Surface</i>	<i>113'</i>	<i>2"</i>	<i>113</i>	<i>117</i>	<i>Sand & gravel</i>		<i>Surface</i>	<i>117'</i>

7. CASING, LINER, CURBING, AND SCREEN			
Dia. (in.)	Kind and Weight	From (ft.)	To (ft.)
<i>4"</i>	<i>PE 1079 BLK New</i>	<i>Surface</i>	<i>113</i>
<i>2</i>	<i>Stainless steel well screen</i>	<i>113</i>	<i>117</i>

8. GROUT OR OTHER SEALING MATERIAL	10. TYPE OF DRILLING MACHINE USED
Kind <i>NONE</i>	From (ft.) To (ft.) <i>Surface</i> <i>113</i>
	<input checked="" type="checkbox"/> Cable Tool <input type="checkbox"/> Direct Rotary <input type="checkbox"/> Reverse Rotary <input type="checkbox"/> Rotary - air w/drilling mud <input type="checkbox"/> Rotary - hammer with drilling mud & air <input type="checkbox"/> Jetting with Air Water
	Well construction completed on <i>5-2</i> 19 <i>74</i>

11. MISCELLANEOUS DATA	Well is terminated <i>10</i> inches <input checked="" type="checkbox"/> above final grade <input type="checkbox"/> below
Yield test: <i>2</i> Hrs. at <i>80</i> GPM	Well disinfected upon completion <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
Depth from surface to normal water level <i>67</i> ft.	Well sealed watertight upon completion <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
Depth to water level when pumping <i>67</i> ft.	

Water sample sent to *Lacrosse* laboratory on: *5-6-74* 19

Your opinion concerning other pollution hazards, information concerning difficulties encountered, and data relating to nearby wells, screens, seals, type of casing joints, method of finishing the well, amount of cement used in grouting, blasting, sub-surface pumprooms, access pits, etc., should be given on reverse side.

SIGNATURE <i>Duane Zoumbon</i> Registered Well Driller	COMPLETE MAIL ADDRESS <i>P 2 Houston Minn 55943</i>
--	--

Please do not write in space below				
COLIFORM TEST RESULT	GAS - 24 HRS.	GAS - 48 HRS.	CONFIRMED	REMARKS

FEB 24 1978

NOTE

WHITE COPY - DIVISION'S COPY
GREEN COPY - DRILLER'S COPY
YELLOW COPY - OWNER'S COPY

1. COUNTY LA CROIXE CHECK ONE Town Village City NAME ONALASKA

2. LOCATION - 1/4 Section NE 1/4 Section SE Township 29 Range 17-N 7-W

OR - Grid or street no. Street name OAK PARK ADDN. 3. OWNER AT TIME OF DRILLING CHARLES VAN RIVER

AND - If available subdivision name, lot & block no. ADDRESS 1312 HERMAN CT. POST OFFICE ONALASKA, WIS.

4. Distance in feet from well to nearest: (Record answer in appropriate block)

BUILDING	SANITARY SEWER C. I.	FLOOR DRAIN C. I.	FOUNDATION DRAIN SEWER CONNECTED	FOUNDATION DRAIN INDEPENDENT	WASTE WATER DRAIN C. I.
17	27	32			37

CLEAR WATER DRAIN C. I.	SEPTIC TANK	PRIVY	SEEPAGE PIT	ABSORPTION FIELD	BARN	SILLO	ABANDONED WELL	SINK HOLE
-	68		79	-			-	

OTHER POLLUTION SOURCES (Give description such as dump, quarry, drainage well, stream, pond, lake, etc.) NONE

5. Well is intended to supply water for: HOME USE

6. DRILLHOLE

Dia. (in.)	From (ft.)	To (ft.)	Dia. (in.)	From (ft.)	To (ft.)	9. FORMATIONS Kind	From (ft.)	To (ft.)
4	Surface	105	2	105	110	SAND & GRAVEL	Surface	110

7. CASING, LINER, CURBING, AND SCREEN

Dia. (in.)	Kind and Weight	From (ft.)	To (ft.)
4	PRIME 237 WALL ASTM A-53 T&C BLACK STEEL	Surface	105
2	CLAYTON MARK SS-176 60 GAUZE	105	110

8. GROUT OR OTHER SEALING MATERIAL

Kind	From (ft.)	To (ft.)
NONE	Surface	

10. TYPE OF DRILLING MACHINE USED

Cable Tool Direct Rotary Reverse Rotary
 Rotary - air w/drilling mud Rotary - hammer with drilling mud & air Jetting with Air Water

Well construction completed on OCT 8 1975

11. MISCELLANEOUS DATA

Yield test: 2 Hrs. at 10 GPM Well is terminated 12 inches above below final grade

Depth from surface to normal water level 82 ft. Well disinfected upon completion Yes No

Depth to water level when pumping 84 ft. Well sealed watertight upon completion Yes No

Water sample sent to LA CROIXE laboratory on: 12-22 1975

Your opinion concerning other pollution hazards, information concerning difficulties encountered, and data relating to nearby wells, screens, seals, type of casing joints, method of finishing the well, amount of cement used in grouting, blasting, sub-surface pumphrooms, access pits, etc., should be given on reverse side.

SIGNATURE David N. Pahn Registered Well Driller COMPLETE MAIL ADDRESS P.O. Box 65, ONALASKA, WIS.

COLIFORM TEST RESULT GAS - 24 HRS. GAS - 48 HRS. CONFIRMED REMARKS

WELL CONSTRUCTOR'S REPORT
FORM 3300-15

JUN 5 1975

NOTE
WHITE COPY - DIVISION'S COPY
GREEN COPY - DRILLER'S COPY
YELLOW COPY - OWNER'S COPY

STATE OF WISCONSIN
DEPARTMENT OF NATURAL RESOURCES
Box 450
Madison, Wisconsin 53701

1. COUNTY Lacrosse CHECK ONE Town Village City Onalaska NAME

2. LOCATION - 1/4 Section SE 1/4 | Section 5E 1/4 | Township 29 | Range T17N | R7W
OR - Grid or street no. | Street name | 3. OWNER AT TIME OF DRILLING George Schubeck
ADDRESS 1328 Johnson st

AND - If available subdivision name, lot & block no. | POST OFFICE Lacrosse

4. Distance in feet from well to nearest:
(Record answer in appropriate block)

BUILDING	SANITARY SEWER C. I.	TILE	FLOOR DRAIN C. I.	TILE	FOUNDATION DRAIN SEWER CONNECTED	INDEPENDENT	WASTE WATER DRAIN C. I.	TILE

CLEAR WATER DRAIN C. I.	TILE	SEPTIC TANK	PRIVY	SEEPAGE PIT	ABSORPTION FIELD	BARN	SILLO	ABANDONED WELL	SINK HOLE
		<u>35</u>			<u>61</u>				

OTHER POLLUTION SOURCES (Give description such as dump, quarry, drainage well, stream, pond, lake, etc.)
NONE

5. Well is intended to supply water for:
Home

6. DRILLHOLE						9. FORMATIONS			
Dia. (in.)	From (ft.)	To (ft.)	Dia. (in.)	From (ft.)	To (ft.)	Kind	From (ft.)	To (ft.)	
<u>4"</u>	<u>Surface</u>	<u>111'</u>	<u>2"</u>	<u>111'</u>	<u>115'</u>	<u>Sand & Gravel</u>	<u>Surface</u>	<u>115'</u>	

7. CASING, LINER, CURBING, AND SCREEN			
Dia. (in.)	Kind and Weight	From (ft.)	To (ft.)
<u>4"</u>	<u>10 7/8 New Blk PE</u>	<u>Surface</u>	<u>111</u>
<u>2"</u>	<u>stainless steel 4' well screen Johnson</u>	<u>111'</u>	<u>115'</u>

8. GROUT OR OTHER SEALING MATERIAL			10. TYPE OF DRILLING MACHINE USED		
Kind	From (ft.)	To (ft.)	<input checked="" type="checkbox"/> Cable Tool	<input type="checkbox"/> Direct Rotary	<input type="checkbox"/> Reverse Rotary
<u>NONE</u>	<u>Surface</u>		<input type="checkbox"/> Rotary - air w/drilling mud	<input type="checkbox"/> Rotary - hammer with drilling mud & air	<input type="checkbox"/> Jetting with <input type="checkbox"/> Air <input type="checkbox"/> Water
			Well construction completed on <u>5-19</u> <u>1975</u>		

11. MISCELLANEOUS DATA			
Yield test: <u>3</u>	Hrs. at <u>9</u>	GPM	Well is terminated <u>12</u> inches <input checked="" type="checkbox"/> above <input type="checkbox"/> below final grade
Depth from surface to normal water level <u>65'</u>	ft.	Well disinfected upon completion <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	Well sealed watertight upon completion <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
Depth to water level when pumping <u>65'</u>	ft.	Water sample sent to <u>Lacrosse</u> laboratory on: <u>5-28</u> <u>1975</u>	

Your opinion concerning other pollution hazards, information concerning difficulties encountered, and data relating to nearby wells, screens, seals, type of casing joints, method of finishing the well, amount of cement used in grouting, blasting, sub-surface pumphooms, access pits, etc., should be given on reverse side.

SIGNATURE Quane Frankson Registered Well Driller | COMPLETE MAIL ADDRESS R 2 Hauerton main 55942

Please do not write in space below

COLIFORM TEST RESULT	GAS - 24 HRS.	GAS - 48 HRS.	CONFIRMED	REMARKS

MAY 19 1973

WELL CONSTRUCTOR'S REPORT
FORM 3300-15

STATE OF WISCONSIN
DEPARTMENT OF NATURAL RESOURCES
Box 450
Madison, Wisconsin 53701

NOTE

WHITE COPY - DIVISION'S COPY
GREEN COPY - DRILLER'S COPY
YELLOW COPY - OWNER'S COPY

1. COUNTY LACROSSE CHECK ONE Town Village City NAME ONALASKA

2. LOCATION - 1/4 Section SE | Section SE | Township 29 | Range 17-N | 7-W 3. OWNER AT TIME OF DRILLING MIDWAY MACHINE PRODUCTS.

OR - Grid or street no. Street name ADDRESS RH 2

AND - If available subdivision name, lot & block no. POST OFFICE ONALASKA, WIS

4. Distance in feet from well to nearest: BUILDING C.I. 6 SANITARY SEWER TILE C.I. 19 FLOOR DRAIN C.I. NONE FOUNDATION DRAIN SEWER CONNECTED NONE INDEPENDENT WASTE WATER DRAIN C.I. 21 TILE

CLEAR WATER DRAIN C.I. - TILE SEPTIC TANK 71 PRIVY - SEEPAGE PIT 80 ABSORPTION FIELD - BARN - SILO - ABANDONED WELL - SINK HOLE -

OTHER POLLUTION SOURCES (Give description such as dump, quarry, drainage well, stream, pond, lake, etc.) NONE

5. Well is intended to supply water for: MACHINE SHOP

6. DRILLHOLE Dia. (in.) From (ft.) To (ft.) Dia. (in.) From (ft.) To (ft.) 9. FORMATIONS Kind From (ft.) To (ft.)
4 Surface 42 2 42 47 SAND & GRAVEL Surface 47

7. CASING, LINER, CURBING, AND SCREEN Dia. (in.) Kind and Weight From (ft.) To (ft.)
4" ID PRIME 237 WALL Surface 42
ASTM A-53
T&C BLACK STEEL
3" ID CLAYTON MARK
SS-176 60 GAUGE 42 47

8. GROUT OR OTHER SEALING MATERIAL Kind From (ft.) To (ft.)
NONE Surface

10. TYPE OF DRILLING MACHINE USED Cable Tool Direct Rotary Reverse Rotary Rotary - air w/drilling mud Rotary - hammer with drilling mud & air Jetting with Air Water

Well construction completed on SEPT 19 71

11. MISCELLANEOUS DATA Yield test: 2 Hrs. at 12 GPM Well is terminated 9 inches above below final grade

Depth from surface to normal water level 14 ft. Well disinfected upon completion Yes No

Depth to water level when pumping 15 ft. Well sealed watertight upon completion Yes No

Water sample sent to LACROSSE laboratory on: MAY 29 1973

Your opinion concerning other pollution hazards, information concerning difficulties encountered, and data relating to nearby wells, screens, seals, type of casing joints, method of finishing the well, amount of cement used in grouting, blasting, sub-surface pumphooms, access pits, etc., should be given on reverse side.

SIGNATURE [Signature] COMPLETE MAIL ADDRESS P.O. Box 204, ONALASKA, WIS.
Registered Well Driller

POLIFORM TEST RESULT GAS - 24 HRS. GAS - 48 HRS. CONFIRMED REMARKS

MAY 29 1973

WELL CONSTRUCTOR'S REPORT
FORM 3300-15

STATE OF WISCONSIN
DEPARTMENT OF NATURAL RESOURCES
Box 450
Madison, Wisconsin 53701

NOTE
WHITE COPY - DIVISION'S COPY
GREEN COPY - DRILLER'S COPY
YELLOW COPY - OWNER'S COPY

1. COUNTY LA CROSSE CHECK ONE Town Village City NAME ONALASKA

2. LOCATION - 1/4 Section SE | Section SE | Township 29 | Range 17-N | 7-W 3. OWNER AT TIME OF DRILLING W. STOLT

OR - Grid or street no. Street name OAK PARK ADDN. ADDRESS R# 3

AND - If available subdivision name, lot & block no. POST OFFICE ONALASKA, WIS

4. Distance in feet from well to nearest: BUILDING C. I. 6 SANITARY SEWER TILE 27 FLOOR DRAIN C. I. 16 FOUNDATION DRAIN SEWER CONNECTED INDEPENDENT WASTE WATER DRAIN C. I. 21 TILE

CLEAR WATER DRAIN C. I. - TILE - SEPTIC TANK 68 PRIVY - SEEPAGE PIT 79 ABSORPTION FIELD - BARN - SILO - ABANDONED WELL - SINK HOLE -

OTHER POLLUTION SOURCES (Give description such as dump, quarry, drainage well, stream, pond, lake, etc.) NONE

5. Well is intended to supply water for: HOME USE

6. DRILLHOLE 9. FORMATIONS

Dia. (in.)	From (ft.)	To (ft.)	Dia. (in.)	From (ft.)	To (ft.)	Kind	From (ft.)	To (ft.)
<u>4</u>	<u>Surface</u>	<u>105</u>	<u>2</u>	<u>105</u>	<u>110</u>	<u>SAND + GRAVEL</u>	<u>Surface</u>	<u>110</u>

7. CASING, LINER, CURBING, AND SCREEN

Dia. (in.)	Kind and Weight	From (ft.)	To (ft.)
<u>4" ID</u>	<u>PRIME 232 WALL</u>	<u>Surface</u>	<u>105</u>
	<u>ASTM A-53</u>		
	<u>TC BLACK STEEL</u>		
<u>2" ID</u>	<u>CLAYTON MARK</u>		
	<u>SS-176 60 BRUZE</u>	<u>105</u>	<u>110</u>

8. GROUT OR OTHER SEALING MATERIAL Kind NONE From (ft.) Surface To (ft.) 105

10. TYPE OF DRILLING MACHINE USED Cable Tool Direct Rotary Reverse Rotary Rotary - air w/drilling mud Rotary - hammer with drilling mud & air Jetting with Air Water

Well construction completed on JUNE 19 71

11. MISCELLANEOUS DATA Yield test: 2 Hrs. at 10 GPM Well is terminated 10 inches above below final grade

Depth from surface to normal water level 74 ft. Well disinfected upon completion Yes No

Depth to water level when pumping 76 ft. Well sealed watertight upon completion Yes No

Water sample sent to LA CROSSE laboratory on: JUNE 5 1973

Your opinion concerning other pollution hazards, information concerning difficulties encountered, and data relating to nearby wells, screens, seals, type of casing joints, method of finishing the well, amount of cement used in grouting, blasting, sub-surface pumphrooms, access pits, etc., should be given on reverse side.

SIGNATURE [Signature] COMPLETE MAIL ADDRESS P.O. Box 204, ONALASKA, WIS
Registered Well Driller

COLIFORM TEST RESULT GAS - 24 HRS. GAS - 48 HRS. CONFIRMED REMARKS

WELL CONSTRUCTOR'S REPORT
FORM 3300-15

APR 9 1973

STATE OF WISCONSIN
DEPARTMENT OF NATURAL RESOURCES
Box 450
Madison, Wisconsin 53701

NOTE

WHITE COPY - DIVISION'S COPY
GREEN COPY - DRILLER'S COPY
YELLOW COPY - OWNER'S COPY

1. COUNTY La Crosse CHECK ONE Town Village City ^{NAME} Onalaska

2. LOCATION - 1/4 Section SW | Section SE | Township 29 | Range 17 | 7W 3. OWNER AT TIME OF DRILLING R. W. Cornforth

OR - Grid or street no. Lot 55 Street name Schaller Oak Park ADDRESS La Crescent

AND - If available subdivision name, lot & block no. POST OFFICE MINN

4. Distance in feet from well to nearest: BUILDING 5' SANITARY SEWER C.I. TILE FLOOR DRAIN C.I. TILE FOUNDATION DRAIN SEWER CONNECTED INDEPENDENT WASTE WATER DRAIN C.I. TILE

CLEAR WATER DRAIN C.I. TILE SEPTIC TANK 40' PRIVY SEEPAGE PIT ABSORPTION FIELD 60' BARN SILO ABANDONED WELL SINK HOLE

OTHER POLLUTION SOURCES (Give description such as dump, quarry, drainage well, stream, pond, lake, etc.)

5. Well is intended to supply water for: Home

6. DRILLHOLE						9. FORMATIONS			
Dia. (in.)	From (ft.)	To (ft.)	Dia. (in.)	From (ft.)	To (ft.)	Kind	From (ft.)	To (ft.)	
4"	Surface	131'				Sand & Gravel	Surface	135'	
2"	131'	135'							

7. CASING, LINER, CURBING, AND SCREEN				
Dia. (in.)	Kind and Weight	From (ft.)	To (ft.)	
4"	P.E. 10.79 BIK	Surface	131'	
2"	Stainless Well Point	131	135'	

8. GROUT OR OTHER SEALING MATERIAL Kind None From (ft.) Surface To (ft.)

10. TYPE OF DRILLING MACHINE USED Cable Tool Direct Rotary Reverse Rotary Rotary - air w/drilling mud Rotary - hammer with drilling mud & air Jetting with Air Water

Well construction completed on C-30 1971

11. MISCELLANEOUS DATA Yield test: 4 Hrs. at 7 GPM Well is terminated 8 inches above final grade below

Depth from surface to normal water level 92 ft. Well disinfected upon completion Yes No

Depth to water level when pumping 92 ft. Well sealed watertight upon completion Yes No

Water sample sent to To Cross laboratory on: 5-18 1972

Your opinion concerning other pollution hazards, information concerning difficulties encountered, and data relating to nearby wells, screens, seals, type of casing joints, method of finishing the well, amount of cement used in grouting, blasting, sub-surface pumphrooms, access pits, etc., should be given on reverse side.

SIGNATURE Shelbert Registered Well Driller COMPLETE MAIL ADDRESS 914 Adams

Please do not write in space below

COLIFORM TEST RESULT	GAS - 24 HRS.	GAS - 48 HRS.	CONFIRMED	REMARKS
----------------------	---------------	---------------	-----------	---------

SEP 8 9 1987

1. COUNTY LAX		CHECK (✓) ONE: <input checked="" type="checkbox"/> Town <input type="checkbox"/> Village <input type="checkbox"/> City			Name Omaleska					
2. LOCATION 1/4 Section or Gov't. Lot ✓ SW SE OR - Grid or Street No. Street or Road Name AND - If available subdivision name, lot & block No.		Section 29	Township 17N	Range 7W	3. NAME <input checked="" type="checkbox"/> OWNER <input type="checkbox"/> AGENT AT TIME OF DRILLING CHECK (✓) ONE Willard Manske ADDRESS NS312 Hwy 53 POST OFFICE Omaleska WI ZIP CODE 54650					
4. Distance in feet from well to nearest: (Record answer in appropriate block)		Building 14'	Sanitary Bldg. Drain C.I. 31 Other	Sanitary Bldg. Sewer C.I. 33 Other	Floor Drain Connected To: C.I. Sewer 21 Other Sewer	Storm Bldg. Drain C.I. Other	Storm Bldg. Sewer C.I. Other			
Street Sewer San. Storm	Other Sewers C.I. Other	Foundation Sewer Clearwater Dr.	Drain Connected to: Sewage Sump Clearwater Sump	Sewage Sump C.I. Other	Clearwater Sump	Septic Tank 34	Holding Tank	Sewage Absorption Unit Seepage Pit Seepage Bed Seepage Trench: 68	Manure Hopper or Retention or Pneumatic Tank	
Privy Pet Waste Pit	Pit: Nonconforming Existing Well Pump Tank	Subsurface Pump Nonconforming Existing	Barn Gutter	Animal Barn Pen	Animal Yard	Silo With Pit	Glass Lined Storage Facility	Silo w/o Pit	Earthen Storage Trench Or Pit	Earthen Manure Basin
Temporary Manure Stack or Platform	Watertight Liquid Manure Tank or Basin	Manure Pressure Pipe	Subsurface Gasoline or Oil Tank	Waste Pond or Land Disposal Unit (Specify Type)	Manure Storage Basin Concrete Floor Only Concrete Floor and Partial Concrete Walls	Other (Describe) None				
5. Well is intended to supply water for: Home				9. FORMATIONS						
6. DRILLHOLE				Kind		From (ft.)	To (ft.)			
Dia. (in.)	From (ft.)	To (ft.)	Dia. (in.)	From (ft.)	To (ft.)	Sand + Gravel		Surface	105	
4	Surface	105								
7. CASING, LINER, CURBING AND SCREEN										
Dia. (in.)	Material, Weight, Specification Mfg. & Method of Assembly		From (ft.)	To (ft.)						
4	ASTM A 53-B weld 237 w. 11 10.97 UAC20119		Surface	103						
4	4" Rom X 3' st. st.		102	105						
8. GROUT OR OTHER SEALING MATERIAL										
Kind		From (ft.)	To (ft.)							
		Surface								
				10. TYPE OF DRILLING MACHINE USED						
				<input checked="" type="checkbox"/> Cable Tool		<input type="checkbox"/> Rotary-hammer w/drilling mud & air		<input type="checkbox"/> Jetting with		
				<input type="checkbox"/> Rotary-air w/drilling mud		<input type="checkbox"/> Rotary-hammer & air		<input type="checkbox"/> Air		
				<input type="checkbox"/> Rotary-w/drilling mud		<input type="checkbox"/> Reverse Rotary		<input type="checkbox"/> Water		
				Well construction completed on 8/10 19 87						
11. MISCELLANEOUS DATA										
Yield Test: 3		Hrs. at 13	GPM		Well is terminated 0 inches		<input checked="" type="checkbox"/> above final grade		<input type="checkbox"/> below	
Depth from surface to normal water level 75 Ft.		Well disinfected upon completion		<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No						
Depth of water level when pumping 1078 Ft.		Stabilized <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No		Well sealed watertight upon completion		<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No				
Water sample sent to LAX Co/Heath Dept laboratory on _____ 19__										

Your opinion concerning other pollution hazards, information concerning difficulties encountered, and data relating to nearby wells, screens, seals, method of finishing the well, amount of cement used in grouting, blasting, etc., should be given on reverse side.

Signature **AQUA Ind. RAS** Registered Well Driller Business Name and Complete Mailing Address
AQUA pump & well
NS262 Hwy 53 Omaleska WI 54650

WELL-CONSTRUCTOR'S REPORT

Well-6

APR 16 1973

STATE OF WISCONSIN
DEPARTMENT OF NATURAL RESOURCES
Box 450
Madison, Wisconsin 53701

WHITE COPY - DIVISION'S COPY
GREEN COPY - DRILLER'S COPY
YELLOW COPY - OWNER'S COPY

1. COUNTY La Crosse CHECK ONE Town Village City NAME Onalaska

2. LOCATION (Number and Street or 1/4 section, section, township and range. Also give subdivision name, lot and block numbers when available.)
Lot 2 Block 2 Shelter Oak Park Rd.

3. OWNER AT TIME OF DRILLING Gary Schnick E 1/2 SE Sec 29 ? T17R7W

4. OWNER'S COMPLETE MAIL ADDRESS
Rt #1 Onalaska Wis

5. Distance in feet from well to nearest:

BUILDING	SANITARY SEWER C. I.	FLOOR DRAIN C. I.	FOUNDATION DRAIN SEWER CONNECTED	FOUNDATION DRAIN INDEPENDENT	WASTE WATER DRAIN C. I.

CLEAR WATER DRAIN C. I.	SEPTIC TANK TILE	PRIVY	SEEPAGE PIT	ABSORPTION FIELD	BARN	SILLO	ABANDONED WELL	SINK HOLE
	60		85					

OTHER POLLUTION SOURCES (Give description such as dump, quarry, drainage well, stream, pond, lake, etc.)

6. Well is intended to supply water for: Home

7. DRILLHOLE						10. FORMATIONS			
Dia. (in.)	From (ft.)	To (ft.)	Dia. (in.)	From (ft.)	To (ft.)	Kind	From (ft.)	To (ft.)	
4	Surface	104				Sand & Gravel	Surface	104	

8. CASING, LINER, CURBING, AND SCREEN			
Dia. (in.)	Kind and Weight	From (ft.)	To (ft.)
4"	New T+C Blk 11#	Surface	104

9. GROUT OR OTHER SEALING MATERIAL			
Kind	From (ft.)	To (ft.)	
None	Surface		

11. MISCELLANEOUS DATA
Well construction completed on 11-21 1972

Yield test: 3 Hrs. at 10 GPM
Well is terminated 10 inches above below final grade

Depth from surface to normal water level 70 ft. Well disinfected upon completion Yes No

Depth to water level when pumping 74 ft. Well sealed watertight upon completion Yes No

Water sample sent to _____ laboratory on: 19

Your opinion concerning other pollution hazards, information concerning difficulties encountered, and data relating to nearby wells, screens, seals, type of casing joints, method of finishing the well, amount of cement used in grouting, blasting, sub-surface pumphoms, access pits, etc., should be given on reverse side.

SIGNATURE Walter C. Stuck COMPLETE MAIL ADDRESS 2138 Cannon Rd La Crosse
Registered Well Driller

Please do not write in space below

COLIFORM TEST RESULT	GAS - 24 HRS.	GAS - 48 HRS.	CONFIRMED	REMARKS

WELL CONSTRUCTOR'S REPORT
FORM 3300-15

NOTE

WHITE COPY - DIVISION'S COPY
GREEN COPY - DRILLER'S COPY
YELLOW COPY - OWNER'S COPY

STATE OF WISCONSIN
DEPARTMENT OF NATURAL RESOURCES
Box 450
Madison, Wisconsin 53701

1. COUNTY La Crosse CHECK ONE Town Village City NAME Onatole

2. LOCATION - 1/4 Section SE Section 29 Township 17N Range 7W
OR - Grid or street no. Street name Franklin St. ADDRESS 218 King Custom Home

AND - If available subdivision name, lot & block no. Oak Park addn POST OFFICE Hahnemey Wis

4. Distance in feet from well to nearest:

BUILDING	SANITARY SEWER C. I.	FLOOR DRAIN TILE	FOUNDATION DRAIN SEWER CONNECTED	WASTE WATER DRAIN C. I.
6	18	-	-	-

CLEAR WATER DRAIN C. I.	SEPTIC TANK	PRIVY	SEEPAGE PIT	ABSORPTION FIELD	BARN	SILLO	ABANDONED WELL	SINK HOLE
-	52	-	-	28	-	-	-	-

OTHER POLLUTION SOURCES (Give description such as dump, quarry, drainage well, stream, pond, lake, etc.) none

5. Well is intended to supply water for: Home

6. DRILLHOLE

Dia. (in.)	From (ft.)	To (ft.)	Dia. (in.)	From (ft.)	To (ft.)
4	Surface	105			
2	105	110			

9. FORMATIONS

Kind	From (ft.)	To (ft.)
<u>Sand & Gravel</u>	Surface	110

7. CASING, LINER, CURBING, AND SCREEN

Dia. (in.)	Kind and Weight	From (ft.)	To (ft.)
4	<u>new black 7/8" steel well pipe</u>	Surface	105
2	<u>Stainless Steel Screen</u>	105	110

8. GROUT OR OTHER SEALING MATERIAL

Kind	From (ft.)	To (ft.)
	Surface	

10. TYPE OF DRILLING MACHINE USED

Cable Tool Direct Rotary Reverse Rotary
 Rotary - air w/drilling mud Rotary - hammer with drilling mud & air Jetting with Air Water

11. MISCELLANEOUS DATA

Yield test: 2 Hrs. at 7 GPM
 Depth from surface to normal water level 68 ft.
 Depth to water level when pumping 72 ft.

Well construction completed on July 1972
 Well is terminated 10 inches above below final grade
 Well disinfected upon completion Yes No
 Well sealed watertight upon completion Yes No

Water sample sent to La Crosse laboratory on: April 1973

Your opinion concerning other pollution hazards, information concerning difficulties encountered, and data relating to nearby wells, screens, seals, type of casing joints, method of finishing the well, amount of cement used in grouting, blasting, sub-surface pumphrooms, access pits, etc., should be given on reverse side.

SIGNATURE Roy Over Registered Well Driller COMPLETE MAIL ADDRESS R.R. 2 Hahnemey, Wis

COLIFORM TEST RESULT GAS - 24 HRS. GAS - 48 HRS. CONFIRMED REMARKS

WELL CONSTRUCTOR'S REPORT
FORM 3300-15

MAR 2 1972

STATE OF WISCONSIN
DEPARTMENT OF NATURAL RESOURCES
Box 450
Madison, Wisconsin 53701

NOTE
WHITE COPY - DIVISION'S COPY
GREEN COPY - DRILLER'S COPY
YELLOW COPY - OWNER'S COPY

1. COUNTY <i>La Crosse</i>		CHECK ONE <input checked="" type="checkbox"/> Town <input type="checkbox"/> Village <input type="checkbox"/> City		NAME <i>O. Holmen</i>			
2. LOCATION - 1/4 Section <i>SE</i>			Section <i>29</i>	Township <i>19N</i>	Range <i>7W</i>		
OR - Grid or street no. <i>LOTS-38-39-40-41</i>		Street name <i>Birch St.</i>				3. OWNER AT TIME OF DRILLING <i>Modern Homes "Wax Road"</i>	
AND - If available subdivision name, lot & block no. <i>Oak Park addn. "Schallers"</i>				ADDRESS <i>R.R. 2</i>			POST OFFICE <i>O. Holmen, Wis.</i>
4. Distance in feet from well to nearest:		BUILDING	SANITARY SEWER	FLOOR DRAIN	FOUNDATION DRAIN		WASTE WATER DRAIN
(Record answer in appropriate block)		<i>40</i>	<i>64</i>	<i>62</i>	SEWER CONNECTED	INDEPENDENT	C. I. TILE
CLEAR WATER DRAIN	SEPTIC TANK	PRIVY	SEEPAGE PIT	ABSORPTION FIELD	BARN	SILO	ABANDONED WELL
C. I. TILE	<i>86</i>	<i>137</i>					
OTHER POLLUTION SOURCES (Give description such as dump, quarry, drainage well, stream, pond, lake, etc.) <i>None</i>							
5. Well is intended to supply water for: <i>Home</i>							
6. DRILLHOLE				9. FORMATIONS			
Dia. (in.)	From (ft.)	To (ft.)	Dia. (in.)	From (ft.)	To (ft.)	Kind	From (ft.)
<i>4</i>	Surface	<i>110</i>				<i>Sand & Gravel</i>	Surface
<i>3 1/2</i>	<i>110</i>	<i>114</i>					<i>114</i>
7. CASING, LINER, CURBING, AND SCREEN							
Dia. (in.)	Kind and Weight		From (ft.)	To (ft.)			
<i>4</i>	<i>New Black Trc Steel 11 lb. Per Foot</i>		Surface	<i>110</i>			
<i>3 1/2</i>	<i>Stainless Steel Screen</i>		<i>110</i>	<i>114</i>			
8. GROUT OR OTHER SEALING MATERIAL				10. TYPE OF DRILLING MACHINE USED			
Kind		From (ft.)	To (ft.)	<input checked="" type="checkbox"/> Cable Tool	<input type="checkbox"/> Direct Rotary	<input type="checkbox"/> Reverse Rotary	
		Surface		<input type="checkbox"/> Rotary - air w/drilling mud	<input type="checkbox"/> Rotary - hammer with drilling mud & air	<input type="checkbox"/> Jetting with Air	<input type="checkbox"/> Water
11. MISCELLANEOUS DATA				Well construction completed on <i>July 19 72</i>			
Yield test: <i>3</i>	Hrs. at <i>28</i>	GPM	Well is terminated <i>9</i> inches	<input checked="" type="checkbox"/> above final grade	<input type="checkbox"/> below final grade		
Depth from surface to normal water level <i>67</i> ft.			Well disinfected upon completion	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No		
Depth to water level when pumping <i>73</i> ft.			Well sealed watertight upon completion	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No		
Water, sample sent to <i>La Crosse</i>				laboratory on: <i>Sept 5 19 72</i>			

Your opinion concerning other pollution hazards, information concerning difficulties encountered, and data relating to nearby wells, screens, seals, type of casing joints, method of finishing the well, amount of cement used in grouting, blasting, sub-surface pumprooms, access pits, etc., should be given on reverse side.

SIGNATURE <i>Roy Omer</i> Registered Well Driller		COMPLETE MAIL ADDRESS <i>R.R. 2 Holmen, Wis.</i>	
Please do not write in space below			
COLIFORM TEST RESULT	GAS - 24 HRS.	GAS - 48 HRS.	CONFIRMED
			REMARKS

White Copy - Division's Copy
Green Copy - Driller's Copy
Yellow Copy - Owner's Copy

1. COUNTY Jacobs CHECK (✓) ONE:
 Town Village City Name Onalaska

2. LOCATION SE 1/4 Section or Gov't. Lot Section 29 Township 17N Range 7W 3. NAME OWNER AGENT AT TIME OF DRILLING CHECK (✓) ONE
Modern Homes, Inc
 OR - Grid or Street No. Street or Road Name ADDRESS RR 3
 AND - If available subdivision name, lot & block No. POST OFFICE Onalaska, Wis ZIP CODE 54650
Shaller Oak Park

4. Distance in feet from well to nearest: (Record answer in appropriate block) Building 15 Sanitary Bldg. Drain C.I. PVC Sanitary Bldg. Sewer C.I. PVC Floor Drain Connected To: C.I. Sewer PVC Other Sewer PVC Storm Bldg. Drain C.I. Other Storm Bldg. Sewer C.I. Other

Street Sewer San. Storm C.I. Other Foundation Drain Connected to: Sewer Sewage Sump C.I. Other Clearwater Sump Clearwater Sump Clearwater Sump Septic Tank Holding Tank Sewage Absorption Unit Seepage Pit Seepage Bed 65 Seepage Trench Manure Hopper or Retention or Pneumatic Tank

Privy Pet Waste Pit: Nonconforming Existing Well Pump Tank Subsurface Pumproom Barn Gutter Animal Barn Pen Animal Yard Silo With Pit Glass Lined Storage Facility Silo w/o Pit Earthen Silage Storage Trench Earthen Manure Basin

Temporary Manure Stack or Platform Watertight Liquid Manure Tank or Basin Manure Pressure Pipe Subsurface Casing or Oil Tank Waste Pond or Land Disposal Unit (Specify Type) Manure Storage Basin Concrete Floor Only Concrete Floor and Partial Concrete Walls Other (Describe)

5. Well is intended to supply water for:
Summit / Ed Ray Apartment Bldg

9. FORMATIONS

Kind	From (ft.)	To (ft.)
<u>Sand + Gravel</u>	<u>Surface</u>	<u>97</u>
<u>Coarse Sand + Gravel</u>	<u>97</u>	<u>101</u>

6. DRILLHOLE

Dia. (in.)	From (ft.)	To (ft.)	Dia. (in.)	From (ft.)	To (ft.)
<u>4</u>	<u>Surface</u>	<u>101</u>			

7. CASING, LINER, CURBING AND SCREEN

Dia. (in.)	Mfg. & Method of Assembly	From (ft.)	To (ft.)
<u>4</u>	<u>Union Steel 11 #58</u>	<u>Surface</u>	<u>97</u>
	<u>ATMA 53, PVC</u>	<u>97</u>	<u>101</u>
<u>3"</u>	<u>Johnson 10 slot Screen 8x4 ft pipe</u>	<u>97</u>	<u>101</u>

8. GROUT OR OTHER SEALING MATERIAL

Kind	From (ft.)	To (ft.)
<u>None</u>	<u>Surface</u>	

10. TYPE OF DRILLING MACHINE USED

Cable Tool Rotary-hammer w/drilling mud & air Jetting with Air Water

Rotary-air w/drilling mud Rotary-hammer & air

Rotary-w/drilling mud Reverse Rotary

Well construction completed on 9-24 1981

11. MISCELLANEOUS DATA

Yield Test: 5 Hrs. at 10 GPM

Depth from surface to normal water level 65 Ft.

Depth of water level when pumping 67 Ft. Stabilized Yes No

Well is terminated 18 inches above final grade below

Well disinfected upon completion Yes No

Well sealed watertight upon completion Yes No

Water sample sent to City of Jabrone Health Dept laboratory on 10-7 1981

Your opinion concerning other pollution hazards, information concerning difficulties encountered, and data relating to nearby wells, screens, seals, method of finishing the well, amount of cement used in grouting, blasting, etc., should be given on reverse side.

Signature Richard Carner Registered Well Driller

Business Name and Complete Mailing Address
Richard Carner RT 2 Box 178-N Onalaska, Wis. 54650

MAY 18 1973

WELL CONSTRUCTOR'S REPORT
FORM 3300-15

STATE OF WISCONSIN
DEPARTMENT OF NATURAL RESOURCES
Box 450
Madison, Wisconsin 53701

NOTE
WHITE COPY - DIVISION'S COPY
GREEN COPY - DRILLER'S COPY
YELLOW COPY - OWNER'S COPY

1. COUNTY LA CROSSE	CHECK ONE <input checked="" type="checkbox"/> Town <input type="checkbox"/> Village <input type="checkbox"/> City	NAME ONALASKA
-------------------------------	--	-------------------------

2. LOCATION - 1/4 Section SE4	Section 29	Township T17N	Range R7W	3. OWNER AT TIME OF DRILLING George Shabeck
---	----------------------	-------------------------	---------------------	---

OR - Grid or street no.	Street name	ADDRESS LAX
-------------------------	-------------	-----------------------

AND - If available subdivision name, lot & block no. Shalers Oak Park Lot 95	POST OFFICE 1328 JOHNSON
--	------------------------------------

4. Distance in feet from well to nearest: (Record answer in appropriate block)	BUILDING 7	SANITARY SEWER C. I. TILE	FLOOR DRAIN C. I. TILE	FOUNDATION DRAIN SEWER CONNECTED INDEPENDENT	WASTE WATER DRAIN C. I. TILE
---	----------------------	--------------------------------	-----------------------------	---	-----------------------------------

CLEAR WATER DRAIN C. I. TILE	SEPTIC TANK 35	PRIVY	SEEPAGE PIT	ABSORPTION FIELD 62	BARN	SILO	ABANDONED WELL	SINK HOLE
-----------------------------------	--------------------------	-------	-------------	-------------------------------	------	------	----------------	-----------

OTHER POLLUTION SOURCES (Give description such as dump, quarry, drainage well, stream, pond, lake, etc.)

5. Well is intended to supply water for: Home

6. DRILLHOLE						9. FORMATIONS			
Dia. (in.)	From (ft.)	To (ft.)	Dia. (in.)	From (ft.)	To (ft.)	Kind	From (ft.)	To (ft.)	
4"	Surface	109	2	109	112	SAND & GRAVEL	Surface	112'	

7. CASING, LINER, CURBING, AND SCREEN			
Dia. (in.)	Kind and Weight	From (ft.)	To (ft.)
4"	PE 10.79 BLK	Surface	109
2"	KM SS WELL SCREEN	109	112

8. GROUT OR OTHER SEALING MATERIAL			10. TYPE OF DRILLING MACHINE USED		
Kind NONE	From (ft.) Surface	To (ft.)	<input checked="" type="checkbox"/> Cable Tool	<input type="checkbox"/> Direct Rotary	<input type="checkbox"/> Reverse Rotary
			<input type="checkbox"/> Rotary - air w/drilling mud	<input type="checkbox"/> Rotary - hammer with drilling mud & air	<input type="checkbox"/> Jetting with <input type="checkbox"/> Air <input type="checkbox"/> Water
			Well construction completed on 5-9 1973		

11. MISCELLANEOUS DATA				Well is terminated 11 inches <input checked="" type="checkbox"/> above <input type="checkbox"/> below final grade	
Yield test: 4	Hrs. at 8	GPM	Well disinfected upon completion <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No		
Depth from surface to normal water level 67	ft.	Well sealed watertight upon completion <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No			
Depth to water level when pumping 67	ft.				
Water sample sent to LAX		laboratory on: 5-16 1973			

Your opinion concerning other pollution hazards, information concerning difficulties encountered, and data relating to nearby wells, screens, seals, type of casing joints, method of finishing the well, amount of cement used in grouting, blasting, sub-surface pumphrooms, access pits, etc., should be given on reverse side.

SIGNATURE Allen Haase Registered Well Driller	COMPLETE MAIL ADDRESS 673 Elmstead St. Winona, Minn
--	---

COLIFORM TEST RESULT	GAS - 24 HRS.	GAS - 48 HRS.	CONFIRMED	REMARKS
----------------------	---------------	---------------	-----------	---------

WELL CONSTRUCTOR'S REPORT
FORM 3300-15

MAR 21 1973

STATE OF WISCONSIN
DEPARTMENT OF NATURAL RESOURCES
Box 450
Madison, Wisconsin 53701

NOTE
WHITE COPY - DIVISION'S COPY
GREEN COPY - DRILLER'S COPY
YELLOW COPY - OWNER'S COPY

1. COUNTY La Crosse CHECK ONE Town Village City NAME Orralaska

2. LOCATION SE 29 17N 7E 3. OWNER AT TIME OF DRILLING Modern Home "Wm Wood"

OR - Grid or street no. lots 28-29-30-32-34 Street name Birch. ADDRESS R.R.

AND - If available subdivision name, lot & block no. Schaller's Oak Park addn POST OFFICE Orralaska, Wis

4. Distance in feet from well to nearest:

BUILDING	SANITARY SEWER	FLOOR DRAIN	FOUNDATION DRAIN	WASTE WATER DRAIN
C.I.	TILE	C.I.	SEWER CONNECTED	INDEPENDENT
40	54	58	-	-

CLEAR WATER DRAIN	SEPTIC TANK	PRIVY	SEEPAGE PIT	ABSORPTION FIELD	BARN	SILLO	ABANDONED WELL	SINK HOLE
C.I.	TILE							
-	100	-	-	100	-	-	-	-

OTHER POLLUTION SOURCES (Give description such as dump, quarry, drainage well, stream, pond, lake, etc.)

5. Well is intended to supply water for:

6. DRILLHOLE						9. FORMATIONS			
Dia. (in.)	From (ft.)	To (ft.)	Dia. (in.)	From (ft.)	To (ft.)	Kind	From (ft.)	To (ft.)	
4	Surface	121				Sand & Gravel	Surface	126	
3 1/2	121	126							

7. CASING, LINER, CURBING, AND SCREEN			
Dia. (in.)	Kind and Weight	From (ft.)	To (ft.)
4	new black 4 x 6 Steel 11 1/2" perfor	Surface	121
3 1/2	Stainless Steel 4" x 6"	121	126

8. GROUT OR OTHER SEALING MATERIAL			10. TYPE OF DRILLING MACHINE USED			
Kind	From (ft.)	To (ft.)	<input checked="" type="checkbox"/> Cable Tool	<input type="checkbox"/> Direct Rotary	<input type="checkbox"/> Reverse Rotary	
Surface			<input type="checkbox"/> Rotary - air w/drilling mud	<input type="checkbox"/> Rotary - hammer with drilling mud & air	<input type="checkbox"/> Jetting with <input type="checkbox"/> Air <input type="checkbox"/> Water	

11. MISCELLANEOUS DATA				Well construction completed on <u>Feb 20 1972</u>	
Yield test: <u>2</u>	Hrs. at <u>20</u>	GPM	Well is terminated <u>12</u> inches <input checked="" type="checkbox"/> above <input type="checkbox"/> below final grade		
Depth from surface to normal water level <u>66</u>	ft.	Well disinfected upon completion <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No			
Depth to water level when pumping <u>73</u>	ft.	Well sealed watertight upon completion <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No			

Water sample sent to La Crosse laboratory on: March 20 1973

Your opinion concerning other pollution hazards, information concerning difficulties encountered, and data relating to nearby wells, screens, seals, type of casing joints, method of finishing the well, amount of cement used in grouting, blasting, sub-surface pumphrooms, access pits, etc., should be given on reverse side.

SIGNATURE Roy Dimes Registered Well Driller COMPLETE MAIL ADDRESS R.R. 2 Halmon, Wis

Please do not write in space below

COLIFORM TEST RESULT	GAS - 24 HRS.	GAS - 48 HRS.	CONFIRMED	REMARKS
----------------------	---------------	---------------	-----------	---------

APR 23 1973

WELL CONSTRUCTOR'S REPORT
FORM 3300-15

STATE OF WISCONSIN
DEPARTMENT OF NATURAL RESOURCES
Box 450
Madison, Wisconsin 53701

NOTE

WHITE COPY - DIVISION'S COPY
GREEN COPY - DRILLER'S COPY
YELLOW COPY - OWNER'S COPY

1. COUNTY La Crosse CHECK ONE Town Village City NAME Ondalaska

2. LOCATION - 1/4 Section SE Section 29 Township 19N Range 7W 3. OWNER AT TIME OF DRILLING Working Custom Homes

OR - Grid or street no. Street name ADDRESS

AND - If available subdivision name, lot & block no. POST OFFICE Holmen, Wis

4. Distance in feet from well to nearest: BUILDING C.I. 6 SANITARY SEWER TILE C.I. 9 FLOOR DRAIN TILE C.I. 15 FOUNDATION DRAIN SEWER CONNECTED - INDEPENDENT - WASTE WATER DRAIN C.I. - TILE -

CLEAR WATER DRAIN C.I. - TILE - SEPTIC TANK 52 PRIVY - SEEPAGE PIT - ABSORPTION FIELD 80 BARN - SILO - ABANDONED WELL - SINK HOLE -

OTHER POLLUTION SOURCES (Give description such as dump, quarry, drainage well, stream, pond, lake, etc.) None

5. Well is intended to supply water for: Home

6. DRILLHOLE 9. FORMATIONS

Dia. (in.)	From (ft.)	To (ft.)	Dia. (in.)	From (ft.)	To (ft.)	Kind	From (ft.)	To (ft.)
4	Surface	114	4	114	114	<u>Sand & Gravel</u>	Surface	119
2	114	119	2	114	119			

7. CASING, LINER, CURBING, AND SCREEN

Dia. (in.)	Kind and Weight	From (ft.)	To (ft.)
4	<u>new Black 7/8" Steel with Perfor</u>	Surface	114
2	<u>Stainless Steel Screen</u>	114	119

8. GROUT OR OTHER SEALING MATERIAL Kind Surface From (ft.) Surface To (ft.) 119

10. TYPE OF DRILLING MACHINE USED Cable Tool Direct Rotary Reverse Rotary Rotary - air w/drilling mud Rotary - hammer with drilling mud & air Jetting with Air Water

Well construction completed on July 1972

11. MISCELLANEOUS DATA Yield test: 2 Hrs. at 7 GPM 10 inches Well is terminated above final grade below final grade

Depth from surface to normal water level 89 ft. Well disinfected upon completion Yes No

Depth to water level when pumping 93 ft. Well sealed watertight upon completion Yes No

Water sample sent to La Crosse laboratory on: April 1973

Your opinion concerning other pollution hazards, information concerning difficulties encountered, and data relating to nearby wells, screens, seals, type of casing joints, method of finishing the well, amount of cement used in grouting, blasting, sub-surface pumprooms, access pits, etc., should be given on reverse side.

SIGNATURE Roy Oines Registered Well Driller COMPLETE MAIL ADDRESS R.P. 2 Holmen, Wis

COLIFORM TEST RESULT GAS - 24 HRS. GAS - 48 HRS. CONFIRMED REMARKS

WELL CONSTRUCTOR'S REPORT
FORM 3300-15

APR 26 1979

STATE OF WISCONSIN
DEPARTMENT OF NATURAL RESOURCES
Box 450
Madison, Wisconsin 53701

NOTE

WHITE COPY - DIVISION'S COPY
GREEN COPY - DRILLER'S COPY
YELLOW COPY - OWNER'S COPY

1. COUNTY Lacrosse CHECK ONE Town Village City NAME Onalaska

2. LOCATION - 1/4 Section SE Section 29 Township 12N Range 7E 3. OWNER AT TIME OF DRILLING Wickroy Custom Homes

OR - Grid or street no. Street name ADDRESS

AND - If available subdivision name, lot & block no. POST OFFICE Habman, Wis.

4. Distance in feet from well to nearest: BUILDING SANITARY SEWER FLOOR DRAIN FOUNDATION DRAIN WASTE WATER DRAIN
(Record answer in appropriate block) C. I. TILE C. I. TILE SEWER CONNECTED INDEPENDENT C. I. TILE
8 10 14 - - - -

CLEAR WATER DRAIN SEPTIC TANK PRIVY SEEPAGE PIT ABSORPTION FIELD BARN SILO ABANDONED WELL SINK HOLE
C. I. TILE 54 - - 82 - - - -

OTHER POLLUTION SOURCES (Give description such as dump, quarry, drainage well, stream, pond, lake, etc.) None

5. Well is intended to supply water for: None

6. DRILLHOLE 9. FORMATIONS
Dia. (in.) From (ft.) To (ft.) Dia. (in.) From (ft.) To (ft.) Kind From (ft.) To (ft.)
4 Surface 105 Sand & Gravel Surface 110
2 105 110

7. CASING, LINER, CURBING, AND SCREEN
Dia. (in.) Kind and Weight From (ft.) To (ft.)
4 new black & c steel 4 1/2 per foot Surface 105
2 Stainless Steel Screen 105 110

8. GROUT OR OTHER SEALING MATERIAL 10. TYPE OF DRILLING MACHINE USED
Kind From (ft.) To (ft.) Cable Tool Direct Rotary Reverse Rotary
Surface Rotary - air w/drilling mud Rotary - hammer with drilling mud & air Jetting with Air Water

11. MISCELLANEOUS DATA
Yield test: 2 Hrs. at 7 GPM Well construction completed on July 19 72
Well is terminated 10 inches above below final grade
Depth from surface to normal water level 80 ft. Well disinfected upon completion Yes No
Depth to water level when pumping 84 ft. Well sealed watertight upon completion Yes No
Water sample sent to Lacrosse laboratory on: April 19 73

Your opinion concerning other pollution hazards, information concerning difficulties encountered, and data relating to nearby wells, screens, seals, type of casing joints, method of finishing the well, amount of cement used in grouting, blasting, sub-surface pumprooms, access pits, etc., should be given on reverse side.

SIGNATURE Roy Oina Registered Well Driller COMPLETE MAIL ADDRESS R. L. Habman, Wis.

COLIFORM TEST RESULT GAS - 24 HRS. GAS - 48 HRS. CONFIRMED REMARKS

SEP 9 1977

NOTE:
 White Copy - Division's Copy
 Green Copy - Driller's Copy
 Yellow Copy - Owner's Copy

1. COUNTY LA CROSSE CHECK (✓) ONE: Town Village City Name ONALASKA

2. LOCATION 1/4 Section SE Section 29 Township 17-N Range 7-W 3. NAME OWNER AGENT AT TIME OF DRILLING CHECK (✓) ONE KICKAPOO HOMES
 OR - Grid or Street No. Street Name OAK PARK ADDNG ADDRESS RFD. #1
 AND - If available subdivision name, lot & block No. POST OFFICE SPARTA, WIS.

4. Distance in feet from well to nearest: (Record answer in appropriate block)

Street Sewer		Other Sewers		Foundation Drain Connected to:		Sewage Sump		Clearwater Sump	Septic Tank	Holding Tank	Sewage Absorption Unit		
San.	Storm	C.I.	Other	Sewer	Sewage Sump	C.I.	Other				C.I. Sewer	Other Sewer	C.I.
				Clearwater Dr.	Clearwater Sump							Seepage Pit	
												Seepage Bed	<u>64</u>
												Seepage Trench	

Privy Pet Waste Pit Pit: Nonconforming Existing Well Pump Tank Subsurface Pumproom Nonconforming Existing Barn Gutter Animal Barn Pen Animal Yard Silo With Pit Glass Lined Storage Facility Silo w/o Pit Earthen Silage Storage Trench Or Pit

Temporary Manure Stack Watertight Liquid Manure Tank Solid Manure Storage Structure Subsurface Gasoline or Oil Tank Waste Pond or Land Disposal Unit (Specify Type) Other (Give Description)

5. Well is intended to supply water for: HOME USE 9. FORMATIONS

6. DRILLHOLE						Kind	From (ft.)	To (ft.)
Dia. (in.)	From (ft.)	To (ft.)	Dia. (in.)	From (ft.)	To (ft.)			
<u>4</u>	<u>Surface</u>	<u>108</u>	<u>2</u>	<u>108</u>	<u>113</u>	<u>SAND & GRAVEL</u>	<u>Surface</u>	<u>113</u>

7. CASING, LINER, CURBING AND SCREEN
 Material, Weight, Specification & Method of Assembly

Dia. (in.)	Material, Weight, Specification & Method of Assembly	From (ft.)	To (ft.)
<u>4</u>	<u>PRIME 237 WALL</u>	<u>Surface</u>	<u>108</u>
	<u>ASTM A-53</u>		
	<u>T+C BLACK STEEL</u>		
<u>2</u>	<u>JOHNSON STAINLESS</u>		
	<u>STEEL SLOTTED</u>	<u>108</u>	<u>113</u>

8. GROUT OR OTHER SEALING MATERIAL

Kind	From (ft.)	To (ft.)
<u>NONE</u>	<u>Surface</u>	

10. TYPE OF DRILLING MACHINE USED

Cable Tool Rotary-hammer w/drilling mud & air Jetting with Air Water

Rotary-air w/drilling mud Rotary-hammer & air

Rotary-w/drilling mud Reverse Rotary

11. MISCELLANEOUS DATA

Well construction completed on JULY 29 1977

Yield Test: 2 Hrs. at 10 GPM Well is terminated 10 inches above final grade below

Depth from surface to normal water level 76 Ft. Well disinfected upon completion Yes No

Depth of water level when pumping 77 Ft. Stabilized Yes No Well sealed watertight upon completion Yes No

Water sample sent to LA CROSSE laboratory on SEPT 6 1977

Your opinion concerning other pollution hazards, information concerning difficulties encountered, and data relating to nearby wells, screens, seals, method of finishing the well, amount of cement used in grouting, blasting, etc., should be given on reverse side.

Signature David J. Palm Registered Well Driller Complete Mail Address P.O. Box 65, ONALASKA, WIS.

MAY 25 1976

State of Wisconsin
Department of Natural Resources
Box 450
Madison, Wisconsin 53701

NOTE:
White Copy - Division's Copy
Green Copy - Driller's Copy
Yellow Copy - Owner's Copy

WELL CONSTRUCTOR'S REPORT
Form 3300-15
Rev. 10-75

1. COUNTY LA CROIXE CHECK (✓) ONE: Town Village City Name ONALASKA

2. LOCATION ¼ Section SE Section 29 Township 17-N Range 7-W 3. NAME OWNER AGENT, AT TIME OF DRILLING CHECK (✓) ONE CHARLES VANRIPER # 4

OR - Grid or Street No. Street Name FRANKLIN ST ADDRESS 1312 HERMAN CT.

AND - If available subdivision name, lot & block No. POST OFFICE ONALASKA, WIS

4. Distance in feet from well to nearest: (Record answer in appropriate block)

Building		Sanitary Bldg. Drain		Sanitary Bldg. Sewer		Floor Drain Connected To:		Storm Bldg. Drain		Storm Bldg. Sewer	
<u>6</u>		C.I.	Other	C.I.	Other	C.I. Sewer	Other Sewer	C.I.	Other	C.I.	Other

Street Sewer		Other Sewers		Foundation Drain Connected to:		Sewage Sump		Clearwater Sump		Septic Tank		Holding Tank		Sewage Absorption Unit	
San.	Storm	C.I.	Other	Sewer	Sewage Sump	C.I.	Other	C.I.	Other	Septic Tank	Holding Tank	Seepage Pit	Seepage Bed	Seepage Trench	<u>61</u>

5. Well is intended to supply water for: HOME USE

6. DRILLHOLE

Dia. (in.)	From (ft.)	To (ft.)	Dia. (in.)	From (ft.)	To (ft.)	Kind	From (ft.)	To (ft.)
<u>4</u>	<u>Surface</u>	<u>105</u>	<u>2</u>	<u>105</u>	<u>110</u>	<u>SAND & GRAVEL</u>	<u>Surface</u>	<u>110</u>

7. CASING, LINER, CURBING AND SCREEN

Dia. (in.)	Material, Weight, Specification & Method of Assembly	From (ft.)	To (ft.)
<u>4</u>	<u>PRIME 237 WALL</u>	<u>Surface</u>	<u>105</u>
	<u>ASTM A53</u>		
	<u>T+C BLACK STEEL</u>		
<u>2</u>	<u>CLAYTON MARK</u>	<u>105</u>	<u>110</u>
	<u>S-176 60 GUAGE</u>		

8. GROUT OR OTHER SEALING MATERIAL

Kind	From (ft.)	To (ft.)
<u>NONE</u>	<u>Surface</u>	

9. FORMATIONS

Kind	From (ft.)	To (ft.)
<u>SAND & GRAVEL</u>	<u>Surface</u>	<u>110</u>

10. TYPE OF DRILLING MACHINE USED

<input checked="" type="checkbox"/> Cable Tool	<input type="checkbox"/> Rotary-hammer w/drilling mud & air	<input type="checkbox"/> Jetting with
<input type="checkbox"/> Rotary-air w/drilling mud	<input type="checkbox"/> Rotary-hammer & air	<input type="checkbox"/> Air
<input type="checkbox"/> Rotary-w/drilling mud	<input type="checkbox"/> Reverse Rotary	<input type="checkbox"/> Water

11. MISCELLANEOUS DATA

Yield Test: 2 Hrs. at 10 GPM

Well construction completed on MAY 10 1976

Well is terminated 12 inches above below final grade

Depth from surface to normal water level 78 Ft. Well disinfected upon completion Yes No

Depth of water level when pumping 80 Ft. Stabilized Yes No Well sealed watertight upon completion Yes No

Water sample sent to LA CROIXE laboratory on MAY 12 1976

Your opinion concerning other pollution hazards, information concerning difficulties encountered, and data relating to nearby wells, screens, seals, method of finishing the well, amount of cement used in grouting, blasting, etc., should be given on reverse side.

Signature David H. Park Registered Well Driller Complete Mail Address P.O. Box 65, ONALASKA, WIS.

MAY 25 1976

State of Wisconsin
Department of Natural Resources
Box 450
Madison, Wisconsin 53701

NOTE:

White Copy - Division's Copy
Green Copy - Driller's Copy
Yellow Copy - Owner's Copy

WELL CONSTRUCTOR'S REPORT
Form 3300-15
Rev. 10-75

1. COUNTY LA PROSSE CHECK (✓) ONE: Town Village City Name ONALASKA

2. LOCATION SE Section 29 Township 17-N Range 7-W 3. NAME OWNER AGENT AT TIME OF DRILLING CHECK (✓) ONE CHARLES VAN KIPER #3

OR - Grid or Street No. Street Name FRANKLIN ST. ADDRESS 1312 HERMAN CT.

AND - If available subdivision name, lot & block No. POST OFFICE ONALASKA, WIS.

4. Distance in feet from well to nearest: (Record answer in appropriate block)

Building	Sanitary Bldg. Drain	Sanitary Bldg. Sewer	Floor Drain Connected To:	Storm Bldg. Drain	Storm Bldg. Sewer
<u>5</u>	C.I. Other <u>27</u>	C.I. Other	C.I. Sewer Other Sewer <u>31</u>	C.I. Other	C.I. Other

Street Sewer: San. Storm C.I. Other

Other Sewers: C.I. Other

Foundation Drain Connected to: Sewer Clearwater Dr. Sewage Sump Clearwater Sump

Sewage Sump: C.I. Other

Clearwater Sump: 34

Septic Tank: 52

Holding Tank

Sewage Absorption Unit: Seepage Pit Seepage Bed 65' Seepage Trench

Privy: Pet Waste Pit Pit: Nonconforming Existing Well Pump Tank Subsurface Pumphouse Nonconforming Existing Barn Gutter Animal Barn Pen Animal Yard Silo With Pit Glass Lined Storage Facility Silo w/o Pit Earthen Silage Storage Trench Or Pit

Temporary Manure Stack: Watertight Liquid Manure Tank Solid Manure Storage Structure Subsurface Gasoline or Oil Tank Waste Pond or Land Disposal Unit (Specify Type) Other (Give Description)

5. Well is intended to supply water for: HOME USE

9. FORMATIONS

Kind	From (ft.)	To (ft.)
<u>SAND & GRAVEL</u>	<u>Surface</u>	<u>110</u>

6. DRILLHOLE

Dia. (in.)	From (ft.)	To (ft.)	Dia. (in.)	From (ft.)	To (ft.)
<u>4</u>	<u>Surface</u>	<u>105</u>	<u>2</u>	<u>105</u>	<u>110</u>

7. CASING, LINER, CURBING AND SCREEN

Dia. (in.)	Material, Weight, Specification & Method of Assembly	From (ft.)	To (ft.)
<u>4</u>	<u>PRIME 237 WALL</u>	<u>Surface</u>	<u>105</u>
	<u>ASTM A-53</u>		
	<u>T&C BLACK STEEL</u>		
<u>2</u>	<u>CLANTON MARK</u>		
	<u>SS-176 60 GAUGE</u>	<u>105</u>	<u>110</u>

8. GROUT OR OTHER SEALING MATERIAL

Kind	From (ft.)	To (ft.)
<u>NONE</u>	<u>Surface</u>	

10. TYPE OF DRILLING MACHINE USED

<input checked="" type="checkbox"/> Cable Tool	<input type="checkbox"/> Rotary-hammer w/drilling mud & air	<input type="checkbox"/> Jetting with
<input type="checkbox"/> Rotary-air w/drilling mud	<input type="checkbox"/> Rotary-hammer & air	<input type="checkbox"/> Air
<input type="checkbox"/> Rotary-w/drilling mud	<input type="checkbox"/> Reverse Rotary	<input type="checkbox"/> Water

11. MISCELLANEOUS DATA

Yield Test: 2 Hrs. at 10 GPM

Depth from surface to normal water level 82 Ft.

Depth of water level when pumping 83 Ft. Stabilized Yes No

Well construction completed on APRIL 29 1976

Well is terminated 10 inches above below final grade

Well disinfected upon completion Yes No

Well sealed watertight upon completion Yes No

Water sample sent to LA PROSSE laboratory on MAY 12 1976

Your opinion concerning other pollution hazards, information concerning difficulties encountered, and data relating to nearby wells, screens, seals, method of finishing the well, amount of cement used in grouting, blasting, etc., should be given on reverse side.

Signature Harold N. Palmer Registered Well Driller Complete Mail Address P.O. Box 65, ONALASKA, WIS.

MAY 29 1973

WELL CONSTRUCTOR'S REPORT
FORM 3300-15

STATE OF WISCONSIN
DEPARTMENT OF NATURAL RESOURCES
Box 450
Madison, Wisconsin 53701

NOTE
WHITE COPY - DIVISION'S COPY
GREEN COPY - DRILLER'S COPY
YELLOW COPY - OWNER'S COPY

1. COUNTY LA CROSSE CHECK ONE Town Village City NAME ONALASKA

2. LOCATION - 1/4 Section SE Section 29 Township 17-N Range 7-W 3. OWNER AT TIME OF DRILLING A. WAZ

OR - Grid or street no. Street name Oak Park Hdm. ADDRESS T.# 3

AND - If available subdivision name, lot & block no. POST OFFICE ONALASKA, WIS.

4. Distance in feet from well to nearest: BUILDING C.I. 6 SANITARY SEWER C.I. 14 TILE FLOOR DRAIN C.I. 18 TILE FOUNDATION DRAIN SEWER CONNECTED INDEPENDENT WASTE WATER DRAIN C.I. 23 TILE

CLEAR WATER DRAIN C.I. TILE SEPTIC TANK PRIVY SEEPAGE PIT ABSORPTION FIELD BARN SILO ABANDONED WELL SINK HOLE

OTHER POLLUTION SOURCES (Give description such as dump, quarry, drainage well, stream, pond, lake, etc.) NONE

5. Well is intended to supply water for: HOME USE

6. DRILLHOLE Dia. (in.) From (ft.) To (ft.) 9. FORMATIONS Kind From (ft.) To (ft.)

7. CASING, LINER, CURBING, AND SCREEN Dia. (in.) Kind and Weight From (ft.) To (ft.)

8. GROUT OR OTHER SEALING MATERIAL Kind From (ft.) To (ft.) 10. TYPE OF DRILLING MACHINE USED

11. MISCELLANEOUS DATA Yield test: Hrs. at 10 GPM Well is terminated 11 inches above below final grade

Depth from surface to normal water level 72 ft. Well disinfected upon completion Yes No

Depth to water level when pumping 74 ft. Well sealed watertight upon completion Yes No

Water sample sent to LA CROSSE laboratory on: JUNE 4 1973

SIGNATURE [Signature] COMPLETE MAIL ADDRESS P.O. Box 204, ONALASKA, WIS.

COLIFORM TEST RESULT GAS - 24 HRS. GAS - 48 HRS. CONFIRMED REMARKS

WELL CONSTRUCTOR'S REPORT
FORM 3300-15

NOTE
WHITE COPY - DIVISION'S COPY
GREEN COPY - DRILLER'S COPY
YELLOW COPY - OWNER'S COPY

STATE OF WISCONSIN
DEPARTMENT OF NATURAL RESOURCES
Box 450
Madison, Wisconsin 53701

1. COUNTY LA CROSSE CHECK ONE Town Village City NAME ONALASKA

2. LOCATION - 1/4 Section SE Section 29 Township 17-N Range 7-W
OR - Grid or street no. Street name
3. OWNER AT TIME OF DRILLING CHARLES VAN RIPEK
ADDRESS 307 6TH AVE N.

AND - If available subdivision name, lot & block no. oak Park Addn POST OFFICE ONALASKA, WIS.

1. Distance in feet from well to nearest:		BUILDING	SANITARY SEWER	FLOOR DRAIN	FOUNDATION DRAIN	WASTE WATER DRAIN
(Record answer in appropriate block)		C. I.	TILE	C. I.	SEWER CONNECTED	INDEPENDENT
		<u>6'</u>	<u>19'</u>	<u>23'</u>		<u>22'</u>
CLEAR WATER DRAIN	SEPTIC TANK	PRIVY	SEEPAGE PIT	ABSORPTION FIELD	BARN	SILLO
C. I.	TILE					
<u>-</u>	<u>64</u>	<u>-</u>	<u>75</u>	<u>-</u>	<u>-</u>	<u>-</u>
					ABANDONED WELL	SINK HOLE
					<u>-</u>	<u>-</u>

OTHER POLLUTION SOURCES (Give description such as dump/quarry, drainage well, stream, pond, lake, etc.)
NONE

2. Well is intended to supply water for: HOME USE

6. DRILLHOLE						9. FORMATIONS		
Dia. (in.)	From (ft.)	To (ft.)	Dia. (in.)	From (ft.)	To (ft.)	Kind	From (ft.)	To (ft.)
<u>4"</u>	<u>Surface</u>	<u>105</u>	<u>2</u>	<u>105</u>	<u>110</u>	<u>SAND + GRAVEL</u>	<u>Surface</u>	<u>110</u>

7. CASING, LINER, CURBING, AND SCREEN			
Dia. (in.)	Kind and Weight	From (ft.)	To (ft.)
<u>4" ID</u>	<u>PRIME 237 WALL</u>	<u>Surface</u>	<u>105</u>
	<u>ASTM A-53</u>		
	<u>T&C BLACK STEEL</u>		
<u>2" ID</u>	<u>CLAYTON MARK</u>	<u>105</u>	<u>110</u>
	<u>SS-176 60 GAUGE</u>		

3. GROUT OR OTHER SEALING MATERIAL			10. TYPE OF DRILLING MACHINE USED		
Kind	From (ft.)	To (ft.)	<input checked="" type="checkbox"/> Cable Tool	<input type="checkbox"/> Direct Rotary	<input type="checkbox"/> Reverse Rotary
<u>NONE</u>	<u>Surface</u>		<input type="checkbox"/> Rotary - air w/drilling mud	<input type="checkbox"/> Rotary - hammer with drilling mud & air	<input type="checkbox"/> Jetting with <input type="checkbox"/> Air <input type="checkbox"/> Water
			Well construction completed on <u>FEB 2</u> 19 <u>72</u>		

11. MISCELLANEOUS DATA			
Yield test:	<u>2</u>	Hrs. at	<u>12</u> GPM
Well is terminated	<u>10</u> inches	<input checked="" type="checkbox"/> above final grade	<input type="checkbox"/> below
Depth from surface to normal water level	<u>72</u> ft.	Well disinfected upon completion	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
Depth to water level when pumping	<u>74</u> ft.	Well sealed watertight upon completion	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No

Water sample sent to LA CROSSE laboratory on: MAY 21 1973

Your opinion concerning other pollution hazards, information concerning difficulties encountered, and data relating to nearby wells, screens, seals, type of casing joints, method of finishing the well, amount of cement used in grouting, blasting, sub-surface pumphrooms, access pits, etc., should be given on reverse side.

SIGNATURE David H. P... Registered Well Driller COMPLETE MAIL ADDRESS P.O. Box 204, ONALASKA, WIS.

COLIFORM TEST RESULT GAS - 24 HRS. GAS - 48 HRS. CONFIRMED REMARKS

AUG 15 1975

JAN 22 1975

NOTE

WHITE COPY - DIVISION'S COPY
GREEN COPY - DRILLER'S COPY
YELLOW COPY - OWNER'S COPY

1. COUNTY La Crosse CHECK ONE Town Village City NAME Onalaska

2. LOCATION - 1/4 Section SE Section 29 Township 17N Range 7W 3. OWNER AT TIME OF DRILLING Modern Homes

OR - Grid or street no. Street name ADDRESS R.R.

AND - If available subdivision name, lot & block no. POST OFFICE Onalaska Wis

4. Distance in feet from well to nearest: BUILDING 40 SANITARY C.I. 60 SEWER TILE - FLOOR DRAIN C.I. 58 TILE - FOUNDATION DRAIN SEWER CONNECTED - INDEPENDENT - WASTE WATER DRAIN C.I. - TILE -

CLEAR WATER DRAIN C.I. - TILE - SEPTIC TANK 80 PRIVY - SEEPAGE PIT ~~100~~ ABSORPTION FIELD 100 BARN - SILO - ABANDONED WELL - SINK HOLE -

OTHER POLLUTION SOURCES (Give description such as dump, quarry, drainage well, stream, pond, lake, etc.) None

5. Well is intended to supply water for: Home

6. DRILLHOLE Dia. (in.) 4 From (ft.) Surface To (ft.) 136 9. FORMATIONS Kind Sand & Gravel From (ft.) Surface To (ft.) 136

7. CASING, LINER, CURBING, AND SCREEN Dia. (in.) 4 Kind and Weight new Black Steel 11lb per foot + c From (ft.) Surface To (ft.) 131
4" more Stainless Steel Screen 131 136
(11LB. PER FOOT)

8. GROUT OR OTHER SEALING MATERIAL Kind Surface From (ft.) To (ft.) 10. TYPE OF DRILLING MACHINE USED Cable Tool Direct Rotary Reverse Rotary Rotary - air w/drilling mud Rotary - hammer with drilling mud & air Jetting with Air Water Well construction completed on Aug 20 19 74

11. MISCELLANEOUS DATA Yield test: 3 Hrs. at 12 GPM Well is terminated 10 inches above final grade below

Depth from surface to normal water level 85 ft. Well disinfected upon completion Yes No

Depth to water level when pumping 90 ft. Well sealed watertight upon completion Yes No

Water sample sent to La Crosse laboratory on: 2 18 1975

Your opinion concerning other pollution hazards, information concerning difficulties encountered, and data relating to nearby wells, screens, seals, type of casing joints, method of finishing the well, amount of cement used in grouting, blasting, sub-surface pumphrooms, access pits, etc., should be given on reverse side.

SIGNATURE Roy Oines Registered Well Driller COMPLETE MAIL ADDRESS R.R. #12 Holmen, Wis

COLIFORM TEST RESULT GAS - 24 HRS. GAS - 48 HRS. CONFIRMED REMARKS

NOTE: APR 13 1976

White Copy - Division's Copy
Green Copy - Driller's Copy
Yellow Copy - Owner's Copy

WELL CONSTRUCTOR'S REPORT
Form 3300-15
Rev. 10-75

1. COUNTY LA CROSSE CHECK (✓) ONE: Town Village City Name ONALASKA

2. LOCATION 1/4 Section SE Section 29 Township 17-N Range 7-W 3. NAME OWNER AGENT AT TIME OF DRILLING CHECK (✓) ONE CHARLES VAN RIVER

OR - Grid or Street No. Street Name CRAIG LN. ADDRESS 1312 HERMAN CT.

AND - If available subdivision name, lot & block No. LOT 77 OAK PARK HOOD. POST OFFICE ONALASKA, WIS.

4. Distance in feet from well to nearest: (Record answer in appropriate block)		Building <u>5'</u>		Sanitary Bldg. Drain		Sanitary Bldg. Sewer		Floor Drain Connected To:		Storm Bldg. Drain		Storm Bldg. Sewer			
				C.I.		Other		C.I. Sewer		Other Sewer		C.I.		Other	
				<u>28</u>		<u>31</u>									

Street Sewer		Other Sewers		Foundation Drain Connected to:		Sewage Sump		Clearwater Sump		Septic Tank		Holding Tank		Sewage Absorption Unit			
San.		Storm		C.I.		Other		C.I.		Other		Sewage Pit		Seepage Bed		Seepage Trench	
										<u>30'</u>				<u>59'</u>			

Privy		Pet Waste Pit		Pit: Nonconforming Existing		Subsurface Pumphoom		Barn Gutter		Animal Barn Pen		Animal Yard		Silo With Pit		Glass Lined Storage Facility		Silo w/o Pit		Earthen Silage Storage Trench Or Pit	
				Well Pump Tank		Nonconforming Existing															

Temporary Manure Stack		Watertight Liquid Manure Tank		Solid Manure Storage Structure		Subsurface Gasoline or Oil Tank		Waste Pond or Land Disposal Unit (Specify Type)		Other (Give Description)	

5. Well is intended to supply water for: HOME USE 9. FORMATIONS

Kind	From (ft.)	To (ft.)
<u>SAND & GRAVEL</u>	<u>Surface</u>	<u>120</u>

6. DRILLHOLE

Dia. (in.)	From (ft.)	To (ft.)	Dia. (in.)	From (ft.)	To (ft.)
<u>4</u>	<u>Surface</u>	<u>115</u>	<u>2</u>	<u>115</u>	<u>120</u>

7. CASING, LINER, CURBING AND SCREEN

Dia. (in.)	Material, Weight, Specification & Method of Assembly	From (ft.)	To (ft.)
<u>4</u>	<u>PRIME 237 GAL</u>	<u>Surface</u>	<u>115</u>
	<u>ASTM A-53</u>		
	<u>T-&C BLACK STEEL</u>		
<u>2</u>	<u>CLAYTON MARK</u>		
	<u>JD-176 60 GAUGE</u>	<u>115</u>	<u>120</u>

8. GROUT OR OTHER SEALING MATERIAL

Kind	From (ft.)	To (ft.)
<u>NONE</u>	<u>Surface</u>	

10. TYPE OF DRILLING MACHINE USED

<input checked="" type="checkbox"/> Cable Tool	<input type="checkbox"/> Rotary-hammer w/drilling mud & air	<input type="checkbox"/> Jetting with
<input type="checkbox"/> Rotary-air w/drilling mud	<input type="checkbox"/> Rotary-hammer & air	<input type="checkbox"/> Air
<input type="checkbox"/> Rotary-w/drilling mud	<input type="checkbox"/> Reverse Rotary	<input type="checkbox"/> Water

Well construction completed on MARCH 13 1976

11. MISCELLANEOUS DATA

Yield Test: <u>2</u> Hrs. at <u>10</u> GPM	Well is terminated <u>10</u> inches <input checked="" type="checkbox"/> above final grade <input type="checkbox"/> below
Depth from surface to normal water level <u>92</u> Ft.	Well disinfected upon completion <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
Depth of water level when pumping <u>93</u> Ft. Stabilized <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	Well sealed watertight upon completion <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No

Water sample sent to LA CROSSE laboratory on 3-15 1976

Your opinion concerning other pollution hazards, information concerning difficulties encountered, and data relating to nearby wells, screens, seals, method of finishing the well, amount of cement used in grouting, blasting, etc., should be given on reverse side.

Signature David N. Palm Registered Well Driller Complete Mail Address P.O. Box 65, ONALASKA, WIS.

MAR 16 1976

NOTE:

White Copy - Division's Copy
Green Copy - Driller's Copy
Yellow Copy - Owner's Copy

1. COUNTY LA CROIXE		CHECK (✓) ONE: <input checked="" type="checkbox"/> Town <input type="checkbox"/> Village <input type="checkbox"/> City		Name ONALASKA	
2. LOCATION OR - Grid or Street No. DE. 29 AND - If available subdivision name, lot & block No. 17-N 7-W GRIG LANE DAK PARK ADDN.		3. NAME <input type="checkbox"/> OWNER <input checked="" type="checkbox"/> AGENT AT TIME OF DRILLING-CHECK (✓) ONE CHARLES VAN RIPER		ADDRESS 1312 HERMAN ST. POST OFFICE ONALASKA, WIS.	
4. Distance in feet from well to nearest: (Record answer in appropriate block)		Building 7		Sanitary Bldg. Drain C.I. - Other -	
		Sanitary Bldg. Sewer C.I. 29 Other 29		Floor Drain Connected To: C.I. Sewer 34 Other Sewer -	
		Storm Bldg. Drain C.I. - Other -		Storm Bldg. Sewer C.I. - Other -	
Street Sewer <input checked="" type="checkbox"/> San. <input checked="" type="checkbox"/>		Other Sewers <input checked="" type="checkbox"/> C.I. <input checked="" type="checkbox"/> Other <input checked="" type="checkbox"/>		Foundation Drain Connected to: Sewer <input checked="" type="checkbox"/> Sewage Sump <input checked="" type="checkbox"/> Clearwater Sump <input checked="" type="checkbox"/>	
Clearwater Dr. <input checked="" type="checkbox"/>		Sewage Sump <input checked="" type="checkbox"/> Clearwater Sump <input checked="" type="checkbox"/>		Clearwater Sump <input checked="" type="checkbox"/> Septic Tank 69' Holding Tank <input checked="" type="checkbox"/>	
Sewage Absorption Unit Seepage Pit <input checked="" type="checkbox"/> Seepage Bed <input checked="" type="checkbox"/> Seepage Trench <input checked="" type="checkbox"/>		81'			
Privy <input checked="" type="checkbox"/> Pet Waste Pit <input checked="" type="checkbox"/>		Pit: Nonconforming Existing <input checked="" type="checkbox"/> Well Pump Tank <input checked="" type="checkbox"/>		Subsurface Pumphoom <input checked="" type="checkbox"/> Nonconforming Existing <input checked="" type="checkbox"/>	
Barn Gutter <input checked="" type="checkbox"/>		Animal Barn Pen <input checked="" type="checkbox"/> Animal Yard <input checked="" type="checkbox"/>		Silo With Pit <input checked="" type="checkbox"/> Glass Lined Storage Facility <input checked="" type="checkbox"/>	
Silo w/o Pit <input checked="" type="checkbox"/>		Earthen Silage Storage Trench Or Pit <input checked="" type="checkbox"/>		Other (Give Description) <input checked="" type="checkbox"/>	
Temporary Manure Stack <input checked="" type="checkbox"/>		Watertight Liquid Manure Tank <input checked="" type="checkbox"/> Solid Manure Storage Structure <input checked="" type="checkbox"/>		Subsurface Gasoline or Oil Tank <input checked="" type="checkbox"/> Waste Pond or Land Disposal Unit (Specify Type) <input checked="" type="checkbox"/>	
5. Well is intended to supply water for: HOME USE		9. FORMATIONS			
6. DRILLHOLE		Dia. (in.)		From (ft.) To (ft.)	
Dia. (in.)		From (ft.) To (ft.)		Kind	
4		Surface 105		2 105 110	
				SAND & GRAVEL	
				Surface 110	
7. CASING, LINER, CURBING AND SCREEN		Material, Weight, Specification & Method of Assembly			
Dia. (in.)		From (ft.)		To (ft.)	
4		Surface		105	
				PRIME 237 WALL	
				ASTM A-53	
				T+C BLACK STEEL	
2				110	
				CLAYTON MARK	
				SP-17660 GAUZE	
8. GROUT OR OTHER SEALING MATERIAL		Kind			
Kind		From (ft.)		To (ft.)	
NONE		Surface		-	
10. TYPE OF DRILLING MACHINE USED		<input checked="" type="checkbox"/> Cable Tool <input type="checkbox"/> Rotary-air w/drilling mud <input type="checkbox"/> Rotary-w/drilling mud <input type="checkbox"/> Reverse Rotary			
		<input type="checkbox"/> Rotary-hammer w/drilling mud & air <input type="checkbox"/> Rotary-hammer & air <input type="checkbox"/> Jetting with Air <input type="checkbox"/> Water			
11. MISCELLANEOUS DATA		Well construction completed on FEB 20 1976			
Yield Test: 2 Hrs. at 10 GPM		Well is terminated 10 inches <input checked="" type="checkbox"/> above final grade <input type="checkbox"/> below			
Depth from surface to normal water level 83 Ft.		Well disinfected upon completion <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No			
Depth of water level when pumping 85 Ft. Stabilized <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No		Well sealed watertight upon completion <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No			
Water sample sent to LA CROIXE laboratory on FEB 24 1976					
Your opinion concerning other pollution hazards, information concerning difficulties encountered, and data relating to nearby wells, screens, seals, method of finishing the well, amount of cement used in grouting, blasting, etc., should be given on reverse side.					
Signature Harold J. Parn Registered Well Driller		Complete Mail Address P.O. Box 65, ONALASKA, WIS			

Well Construction Report For
WISCONSIN UNIQUE WELL NUMBER **CD 002**

State of Wisconsin
 Department of Natural Resources
 Private Water Supply - WS/2
 Box 7921
 Madison, WI 53707

JUL 25 1989

Property Owner Picking Custom Homes Telephone Number 608 526-3345
 Mailing Address P.O. Box 67
 City Holman State WI Zip Code 53103
 County of Well Location Lax Permit No. W 1299 Well Completion Date 5/30/89
 M M D D Y Y

1. Location (Please type or print using a black pen.)
 Town City Village Fire # (if available)
 of Onalaska
 Grid or Street Address or Road Name and Number (if available)
Perry Lane

Well Constructor (Business Name) Agua Pump & Well Registration # 14755
 Address N 5862 Highway 53
 City Onalaska State WI Zip Code _____
 2. Mark well location in correct 40-acre parcel of section.
 N
 W X E
 S

Subdivision Name Strawberry Common Lot # 6 Block # 6
 Gov't Lot # 1 or NE 1/4 of Sec 14 of
 Section 29; T 12 N; R 7 E W

3. Well Type New
 Replacement Reconstruction
 of unique well # _____ constructed in 19 88
 Reason for new, replaced or reconstructed well?
Water supply

4. Well serves 2 # of homes and/or _____
 (ex: barn, restaurant, church, school, industry, etc.)
 High Capacity Well? Yes No
 High Capacity Property? Yes No

5. Well Located on Highest Point of Property, Consistent with the General Layout and Surroundings? Yes No If no, explain on back side.
 Well Located in Floodplain? Yes No
 Distance In Feet From Well To Nearest:
 1. Landfill _____
 2. Building Overhang 5'
 3. Septic or Holding Tank 30'
 4. Sewage Absorption Unit 60'
 5. Nonconforming Pit _____
 6. Buried Home Heating Oil Tank _____
 7. Buried Petroleum Tank _____
 8. Shoreline/Swimming Pool _____
 9. Downspout/Yard Hydrant _____
 10. Privy _____
 11. Foundation Drain to Clearwater _____
 12. Foundation Drain to Sewer _____
 13. Building Drain 18'
 14. Building Sewer Gravity Pressure
 Cast Iron or Plastic Other
 15. Collector or Street Sewer _____
 16. Clearwater Sump _____
 17. Wastewater Sump _____
 18. Paved Animal Barn Pen _____
 19. Animal Yard or Shelter _____
 20. Silo - Type _____
 21. Barn Gutter _____
 22. Manure Pipe Gravity Pressure
 Cast Iron or Plastic Other
 23. Other Manure Storage _____
 Other NR 112 Waste Source _____
 24. _____

6. Drillhole Dimensions
 From To
 Dia. (in.) (ft.) (ft.)
4 surface 105
 Method of constructing upper enlarged drillhole only.
 1. Rotary - Mud Circulation
 2. Rotary - Air
 3. Rotary - Foam
 4. Reverse Rotary
 5. Cable-tool Bit 4 in. dia.
 6. Temp. Outer Casing _____ in. dia.
 Removed? Yes No
 If no, explain _____
 7. Other _____

9. Geology
 Type, Caving/Noncaving, Color, Hardness, Etc.
SB Sand and Gravel
 From To
 (ft.) (ft.)
 surface 105

7. Casing, Liner, Screen
 Material, Weight, Specification From To
 Dia. (in.) Mfg. & Method of Assembly (ft.) (ft.)
4 Black steel surface 105
10.28 AS3 ASLm180
T. A. W. A. N. T. C.

10. Static Water Level _____ ft. above ground level
80 ft. below ground surface
 11. Pump Test
 Pumping Level 85 ft. below surface
 Pumping at 10 GPM for 2 hours
 12. Well Is:
 Above Grade
 Below Grade
 Disinfected? Yes No
 Capped? Yes No

8. Grout or Other Sealing Material
 Method From To #
 Kind of Sealing Material (ft.) (ft.) Sacks Cement
 surface _____

13. Did you permanently seal all unused, noncomplying, or unsafe wells?
 Yes No If no, explain _____
 14. Signature of Point Driver or Registered Driller MS Date Signed 7-10-89
 Signature of Drill Rig Operator CD Date Signed _____

Well Construction Report For
WISCONSIN UNIQUE WELL NUMBER CQ 047


State of Wisconsin
 Department of Natural Resources
 Private Water Supply - WS/2
 Box 7921
 Madison, WI 53707

AUG 10 1990

Property Owner Dan Quackebush Telephone Number _____
 Mailing Address N5404 Terrace Drive
 City Onalaska State WI Zip Code 54650
 County of Well Location LaCrosse County Well Location Permit No. W Well Completion Date 7 26 90
 M M D D Y Y

1. Location (Please type or print using a black pen.)
 Town City Village Fire # (if available) _____
 of Onalaska
 Grid or Street Address or Road Name and Number (if available) N5404 Terrace Drive
 Subdivision Name _____ Lot # _____ Block # _____

Well Constructor (Business Name) Registration #
Medary Drilling Co 58
 Address 624 Amy Drive
 City Holmen State WI Zip Code 54636



Gov't Lot # _____ or NE 1/4 of SW 1/4 of Section 29; T 17 N; R 7 E W

3. Well Type New Replacement Reconstruction
 of unique well # _____ constructed in 19 _____
 Reason for new, replaced or reconstructed well? Plugged Sand Point

4. Well serves 1 # of homes and/or Home (ex: barn, restaurant, church, school, industry, etc.)
 High Capacity Well? Yes No
 High Capacity Property? Yes No

Drilled Driven Point Jetted Other _____

5. Well Located on Highest Point of Property, Consistent with the General Layout and Surroundings? Yes No If no, explain on back side.
 Well Located in Floodplain? Yes No
 Distance in Feet From Well To Nearest:
 1. Landfill _____
 2. Building Overhang 10
 3. Septic or Holding Tank 40
 4. Sewage Absorption Unit 55
 5. Nonconforming Pit _____
 6. Buried Home Heating Oil Tank _____
 7. Buried Petroleum Tank _____
 8. Shoreline/Swimming Pool _____
 9. Downspout/Yard Hydrant _____
 10. Privy _____
 11. Foundation Drain to Clearwater _____
 12. Foundation Drain to Sewer _____
 13. Building Drain 20
 Cast Iron or Plastic Other _____
 14. Building Sewer Gravity Pressure
 Cast Iron or Plastic Other _____
 15. Collector or Street Sewer _____
 16. Clearwater Sump _____
 17. Wastewater Sump _____
 18. Paved Animal Barn Pen _____
 19. Animal Yard or Shelter _____
 20. Silo - Type _____
 21. Barn Gutter _____
 22. Manure Pipe Gravity Pressure
 Cast Iron or Plastic Other _____
 23. Other Manure Storage _____
 Other NR 112 Waste Source _____
 24. _____

6. Drillhole Dimensions
 From To
 Dia. (in.) (ft.) (ft.)
4 surface 105
 Method of constructing upper enlarged drillhole only.
 1. Rotary - Mud Circulation
 2. Rotary - Air
 3. Rotary - Foam
 4. Reverse Rotary
 5. Cable-tool Bit 4 in. dia.
 6. Temp. Outer Casing _____ in. dia.
 Removed? Yes No
 If no, explain _____
 7. Other _____

9. Geology
 Type, Caving/Noncaving, Color, Hardness, Etc. From To (ft.) (ft.)

<u>TV</u> - Brown Sand + Gravel	surface	<u>84</u>
<u>TS</u> - Brown Sand	<u>84</u>	<u>105</u>

7. Casing, Liner, Screen
 Material, Weight, Specification From To (ft.) (ft.)
 Dia. (in.) Mfg. & Method of Assembly
4 Sawhill USA surface 105
ASTM-A-589 T+C
.237 wall 11.00#/FT
Beamed + Drifted Type IT
 Dia. (in.) screen type and material From To
2 Stainless Steel 105 108

10. Static Water Level
 _____ ft. above ground level
75 ft. below ground surface
 11. Pump Test
 Pumping Level 85 ft. below surface
 Pumping at 12 GPM for 4 hours
 12. Well Is:
 Above Grade
 Below Grade
 Developed? Yes No
 Disinfected? Yes No
 Capped? Yes No

8. Grout or Other Sealing Material
 Method From To # Sacks Kind of Sealing Material (ft.) (ft.) Cement
Native Material surface _____ _____

13. Did you permanently seal all unused, noncomplying, or unsafe wells?
 Yes No If no, explain _____
 14. Signature of Point Driver or Registered Driller Date Signed
Randy C. Stuber RCS 8-3-90
 Signature of Drill Rig Operator Date Signed
Randy C. Stuber RCS 8-3-90

WGNHS ORIGINAL

First Water Quality Test For
WISCONSIN UNIQUE WELL NUMBER FK 060

State of Wisconsin
Private Water Supply - WS/2 JUL 27 1992
Department of Natural Resources (Please type or print
Box 7921 using a black pen.)
Madison, WI 53707

Property Owner Shirley Stetzer Telephone Number (608) 784 2104
Mailing Address N5425 Penny Lane
City Omaha State WI Zip Code 531630
County of Well Location La Crosse Co. Well Permit No. W 6335 Well Completion Date (mm-dd-yy) 06-24-92

Well Constructor (Business Name) Roy Oines License # 280
Address 406 Walnut St.
City Holmen State WI Zip Code 531636
2. Mark well location with a dot in correct 40-acre parcel of section. N
W X E
S

1. Well Location Please use decimals instead of fractions.
 Town City Village Fire # (If avail.)
of Omaha N5425
Grid or Street Address or Road Name and Number (If avail.)
N5425 Penny Lane
Subdivision Name Lot # Block #
Strawberry Corners 8 16
Gov't Lot # or NE 1/4 of SW 1/4 of
Section 29 T 17 N; R 7 E W
3. Well Type New
 Replacement Reconstruction
of previous unique well # _____ constructed in 19 _____
Reason for new, replaced or reconstructed well? _____
 Drilled Driven Point Jetted Other _____

4. Well serves 1 # of homes and or Home
(Ex: barn, restaurant, church, school, industry, etc.)
High Capacity: Well? Yes No
Property? Yes No

5. Well located on highest point of property, consistent with the general layout and surroundings? Yes No If no, explain on back side.
Well located in floodplain? Yes No
Distance in Feet From Well To Nearest:
1. Landfill 6
2. Building Overhang 50
3. Septic or Holding Tank (circle one) 75
4. Sewage Absorption Unit 15
5. Nonconforming Pit 25
6. Buried Home Heating Oil Tank 15
7. Buried Petroleum Tank 15
8. Shoreline/Swimming Pool 15
9. Downspout/Yard Hydrant 15
10. Privy 15
11. Foundation Drain to Clearwater 15
12. Foundation Drain to Sewer 15
13. Building Drain 15
14. Building Sewer Cast Iron or Plastic Other Gravity Pressure
 Cast Iron or Plastic Other
15. Collector or Street Sewer 15
16. Clearwater Sump 15
17. Wastewater Sump 15
18. Paved Animal Barn Pen 15
19. Animal Yard or Shelter 15
20. Silo - Type 15
21. Barn Gutter 15
22. Manure Pipe Gravity Pressure
 Cast Iron or Plastic Other
23. Other Manure Storage 15
Other NR 112 Waste Source _____
24. _____

6. Drillhole Dimensions
Dia. (in.) From (ft.) To (ft.)
4.5 surface 110
Method of constructing upper enlarged drillhole only.
 1. Rotary - Mud Circulation
 2. Rotary - Air
 3. Rotary - Foam
 4. Reverse Rotary
 5. Cable-tool Bit 4 in. dia.
 6. Temp. Outer Casing _____ in. dia.
Removed? Yes No
If no, explain _____
 7. Other _____

9. Geology
DNR USE ONLY
Type, Caving/Noncaving, Color, Hardness, Etc. From (ft.) To (ft.)
Y Sand & Gravel Surface 110

7. Casing, Liner, Screen
Dia. (in.) Material, Weight, Specification From (ft.) To (ft.)
Manufacturer & Method of Assembly
4.5 NEW-BRACE-P.E. STEEL surface 103
.237 WALL 10.79 #
ASTM A53B
Welded
Sawhill
Dia. (in.) screen type, material & slot size From (ft.) To (ft.)
3.5 PVC Cont Slot 103 107

10. Static Water Level
92 ft. above ground surface
16 ft. below ground surface
12. Well Is: Above Grade Below
11. Pump Test
Developed? Yes No
Disinfected? Yes No
Capped? Yes No
Pumping Level 100 ft. below surface
Pumping at 10 GPM for 3 hours

8. Grout or Other Sealing Material
Method From (ft.) To (ft.) # Sacks Cement
Kind of Sealing Material
surface

13. Did you permanently seal all unused, noncomplying, or unsafe wells?
 Yes No If no, explain _____
14. Signature of Point Driver or Licensed Supervisory Driller Date Signed
Roy Oines 7-6-92
Signature of Drill Rig Operator (Mandatory unless same as above) Date Signed
Tim Dykstra TL 7-6-92

Make additional comments on reverse side about geology, additional screens, water quality, etc.
Comments on reverse side _____ (Check , if yes) _____
DNR WELL CONSTRUCTION REPORT Form 3300-77A Rev. 1-92 174

WGNHS ORIGINAL

WELL CONSTRUCTOR'S REPORT
FORM 3300-15

NOTE
WHITE COPY - DIVISION'S COPY
GREEN COPY - DRILLER'S COPY
YELLOW COPY - OWNER'S COPY

STATE OF WISCONSIN
DEPARTMENT OF NATURAL RESOURCES
Box 450
Madison, Wisconsin 53701

1. COUNTY <u>La Crosse</u>		CHECK ONE <input checked="" type="checkbox"/> Town <input type="checkbox"/> Village <input type="checkbox"/> City		NAME <u>Onalaska</u>		
2. LOCATION - 1/4 Section <u>SE 1/4 29</u> Section <u>29</u> Township <u>T11N</u> Range <u>R7W</u>			3. OWNER AT TIME OF DRILLING <u>Ernest Halley</u>			
OR - Grid or street no.		Street name		ADDRESS <u>Box 25</u>		
AND - If available subdivision name, lot & block no. <u>Heritage Hills Addition</u>			POST OFFICE <u>Nolmen WI 54601</u>			
4. Distance in feet from well to nearest: (Record answer in appropriate block)		BUILDING	SANITARY SEWER	FLOOR DRAIN	FOUNDATION DRAIN	WASTE WATER DRAIN
		C. I.	TILE	C. I.	TILE	SEWER CONNECTED INDEPENDENT
CLEAR WATER DRAIN	SEPTIC TANK	PRIVY	SEEPAGE PIT	ABSORPTION FIELD	BARN	SILLO
C. I.	TILE					ABANDONED WELL
						SINK HOLE

OTHER POLLUTION SOURCES (Give description such as dump, quarry, drainage well, stream, pond, lake, etc.)

5. Well is intended to supply water for: HOME

6. DRILLHOLE						9. FORMATIONS		
Dia. (in.)	From (ft.)	To (ft.)	Dia. (in.)	From (ft.)	To (ft.)	Kind	From (ft.)	To (ft.)
<u>12"</u>	<u>Surface</u>	<u>100'</u>	<u>8"</u>	<u>100</u>	<u>150</u>	<u>Sand & Gravel</u>	<u>Surface</u>	<u>150</u>
7. CASING, LINER, CURBING, AND SCREEN								
Dia. (in.)	Kind and Weight		From (ft.)	To (ft.)				
<u>10"</u>	<u>ASTM A53 Grade B BLK</u>		<u>Surface</u>	<u>100</u>				
<u>8"</u>	<u>ASTM A53 Grade B BLK</u>		<u>Surface</u>	<u>130</u>				
<u>20' 8"</u>	<u>SCREEN</u>		<u>130</u>	<u>150</u>				

3. GROUT OR OTHER SEALING MATERIAL		10. TYPE OF DRILLING MACHINE USED	
Kind	From (ft.)	To (ft.)	
<u>No grout</u>	<u>Surface</u>	<u>100</u>	<input checked="" type="checkbox"/> Cable Tool <input type="checkbox"/> Direct Rotary <input type="checkbox"/> Reverse Rotary
			<input type="checkbox"/> Rotary - air w/drilling mud <input type="checkbox"/> Rotary - hammer with drilling mud & air <input type="checkbox"/> Jetting with <input type="checkbox"/> Air <input type="checkbox"/> Water
		Well construction completed on <u>APR 1 19 77</u>	

11. MISCELLANEOUS DATA		Well is terminated <u>24</u> inches <input checked="" type="checkbox"/> above <input type="checkbox"/> below final grade	
Yield test: <u>Exp'd</u>	Hrs. at <u>300</u>	GPM	Well disinfected upon completion <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
Depth from surface to normal water level <u>100</u> ft.			Well sealed watertight upon completion <input type="checkbox"/> Yes <input type="checkbox"/> No
Depth to water level when pumping <u>110</u> ft.			

Water sample sent to _____ laboratory on: 19

Your opinion concerning other pollution hazards, information concerning difficulties encountered, and data relating to nearby wells, screens, seals, type of casing joints, method of finishing the well, amount of cement used in grouting, blasting, sub-surface pumphrooms, access pits, etc., should be given on reverse side.

SIGNATURE <u>Walter C. Steub</u> Registered Well Driller	COMPLETE MAIL ADDRESS <u>2138 Conoco Rd La Crosse WI 54601</u>
---	---

Please do not write in space below

COLIFORM TEST RESULT <u>Dist. - File - SGS</u>	GAS - 24 HRS.	GAS - 48 HRS.	CONFIRMED	REMARKS
---	---------------	---------------	-----------	---------

WELL CONSTRUCTOR'S REPORT
FORM 3300-15

AUG 15 1975

JAN 22 1976

STATE OF WISCONSIN
DEPARTMENT OF NATURAL RESOURCES
Box 450
Madison, Wisconsin 53701

NOTE
WHITE COPY - DIVISION'S COPY
GREEN COPY - DRILLER'S COPY
YELLOW COPY - OWNER'S COPY

1. COUNTY La Crosse CHECK ONE Town Village City NAME Qualaska

2. LOCATION - 1/4 Section SW Section 29 Township 19N Range 7W 3. OWNER AT TIME OF DRILLING Wm 77000 (Modern Homes)

OR - Grid or street no. Street name ADDRESS Rt. 3

AND - If available subdivision name, lot & block no. POST OFFICE Qualaska, Wis.

4. Distance in feet from well to nearest:

BUILDING	SANITARY C.I.	SEWER TILE	FLOOR DRAIN C.I.	TILE	FOUNDATION DRAIN SEWER CONNECTED	INDEPENDENT	WASTE WATER DRAIN C.I.	TILE
10	26	-	30	-	-	-	-	-

CLEAR WATER DRAIN C.I.	SEPTIC TANK TILE	PRIVY	SEEPAGE PIT	ABSORPTION FIELD	BARN	SILO	ABANDONED WELL	SINK HOLE
-	-	50	-	75	-	-	-	-

OTHER POLLUTION SOURCES (Give description such as dump, quarry, drainage well, stream, pond, lake, etc.) None

5. Well is intended to supply water for: Home

6. DRILLHOLE						9. FORMATIONS			
Dia. (in.)	From (ft.)	To (ft.)	Dia. (in.)	From (ft.)	To (ft.)	Kind	From (ft.)	To (ft.)	
4	Surface	135				Sand & Gravel	Surface	135	

7. CASING, LINER, CURBING, AND SCREEN			
Dia. (in.)	Kind and Weight	From (ft.)	To (ft.)
4	new black pipe steel 11 lb. per foot	Surface	130
4	Standard steel screen 11 lb. per foot	130	135

8. GROUT OR OTHER SEALING MATERIAL			10. TYPE OF DRILLING MACHINE USED			
Kind	From (ft.)	To (ft.)	<input checked="" type="checkbox"/> Cable Tool	<input type="checkbox"/> Direct Rotary	<input type="checkbox"/> Reverse Rotary	
	Surface		<input type="checkbox"/> Rotary - air w/drilling mud	<input type="checkbox"/> Rotary - hammer with drilling mud & air	<input type="checkbox"/> Jetting with <input type="checkbox"/> Air <input type="checkbox"/> Water	

11. MISCELLANEOUS DATA				Well construction completed on	
Yield test:	<u>3</u>	Hrs. at	<u>12</u>	GPM	<u>12-23</u> 19 <u>74</u>
Depth from surface to normal water level	<u>70</u>	ft.	Well is terminated	<u>10</u>	inches <input checked="" type="checkbox"/> above <input type="checkbox"/> below final grade
Depth to water level when pumping	<u>75</u>	ft.	Well disinfected upon completion	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	
			Well sealed watertight upon completion	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	

Water sample sent to La Crosse laboratory on: 2-18 1975

Your opinion concerning other pollution hazards, information concerning difficulties encountered, and data relating to nearby wells, screens, seals, type of casing joints, method of finishing the well, amount of cement used in grouting, blasting, sub-surface pumphouses, access pits, etc., should be given on reverse side.

SIGNATURE Roy Currier Registered Well Driller COMPLETE MAIL ADDRESS Rt 2 Haberman, Wis.

Please do not write in space below

COLIFORM TEST RESULT	GAS - 24 HRS.	GAS - 48 HRS.	CONFIRMED	REMARKS
----------------------	---------------	---------------	-----------	---------

WELL CONSTRUCTOR'S REPORT TO WISCONSIN STATE BOARD OF HEALTH

Well 6

See Instructions on Reverse Side

RECEIVED

NOV 2 1954

SANITARY ENGINEERING

1. County LA Crosse Town OMALASKA
 Village City Check one and give name
 2. Location SW 40F Sec 29 T-17N R 7W
 Name of street and number of premise or Section, Town and Range numbers
 3. Owner or Agent Robt Ringdal
 Name of individual, partnership or firm
 4. Mail Address Rt # 1 OMAASKA
 Complete address required

5. From well to nearest: Building 5 ft; sewer _____ ft; drain _____ ft; septic tank 25 ft;
 dry well or filter bed _____ ft; abandoned well _____ ft.

6. Well is intended to supply water for: Home

7. DRILLHOLE:

Dia. (in.)	From (ft.)	To (ft.)	Dia. (in.)	From (ft.)	To (ft.)
4"	0	140			

10. FORMATIONS:

Kind	From (ft.)	To (ft.)
Sand & Gravel	0	140

8. CASING AND LINER PIPE OR CURBING:

Dia. (in.)	Kind and Weight	From (ft.)	To (ft.)
4"	STD DRK Pipe	0	136
4" x 4"	Johnson Well Screen		

9. GROUT:

Kind	From (ft.)	To (ft.)
No we		

11. MISCELLANEOUS DATA:

Yield test: 4 Hrs. at 10 GPM.
 Depth from surface to water-level: 90 ft.
 Water-level when pumping: _____ ft.
 Water sample was sent to the state laboratory at:
La Crosse on 9-14 1959
 City

Construction of the well was completed on:

9-14 1959

The well is terminated 8 inches
 above, below the permanent ground surface.

Was the well disinfected upon completion?
 Yes No _____

Was the well sealed watertight upon completion?
 Yes No _____

Signature Shelburne Shook
 Registered Well Driller

914 Adams La Crosse
 Complete Mail Address

Please do not write in space below

Rec'd _____ No. _____
 Ans'd _____
 Interpretation _____

10 ml 10 ml 10 ml 10 ml 10 ml
 Gas—24 hrs. _____
 48 hrs. _____
 Confirm _____
 B. Coli _____
 Examiner _____

NOTE:

White Copy - Division's Copy
 Green Copy - Driller's Copy
 Yellow Copy - Owner's Copy

1. COUNTY La Crosse CHECK (✓) ONE: Town Village City Name Onalaska

2. LOCATION SW Section 29 Township 17 N Range 7 W 3. NAME OWNER AGENT AT TIME OF DRILLING CHECK (✓) ONE
 OR - Grid or Street No. Street Name ADDRESS Dave Schroeder
522 Copeland Ave.
 AND - If available subdivision name, lot & block No. POST OFFICE Onalaska, Wis. 54650

4. Distance in feet from well to nearest: (Record answer in appropriate block) Building 20'

Sanitary Bldg. Drain		Sanitary Bldg. Sewer		Floor Drain Connected To:		Storm Bldg. Drain		Storm Bldg. Sewer	
C.I.	Other	C.I.	Other	C.I. Sewer	Other Sewer	C.I.	Other	C.I.	Other

Street Sewer: San. Storm C.I. Other
 Other Sewers: Sewer Clearwater Dr.
 Foundation Drain Connected to: Sewage Sump C.I. Other
 Clearwater Sump
 Septic Tank 50'
 Holding Tank
 Sewage Absorption Unit 65'
 Seepage Pit
 Seepage Bed
 Seepage Trench

Privy: Pet Waste Pit
 Pit: Nonconforming Existing
 Well Pump Tank
 Subsurface Pumphoom Nonconforming Existing
 Barn Gutter
 Animal Barn Pen
 Animal Yard
 Silo With Pit
 Glass Lined Storage Facility
 Silo w/o Pit
 Earthen Silage Storage Trench Or Pit

Temporary Manure Stack
 Watertight Liquid Manure Tank
 Solid Manure Storage Structure
 Subsurface Gasoline or Oil Tank
 Waste Pond or Land Disposal Unit (Specify Type)
 Other (Give Description)

5. Well is intended to supply water for: Country home

6. DRILLHOLE

Dia. (in.)	From (ft.)	To (ft.)	Dia. (in.)	From (ft.)	To (ft.)
<u>6</u>	<u>Surface</u>	<u>100</u>			

9. FORMATIONS

Kind	From (ft.)	To (ft.)
<u>loose sand</u>	<u>Surface</u>	<u>95</u>
<u>gravel bed</u>	<u>95</u>	<u>107</u>

This well has an 8 foot sand screen on bottom. The 4" screen is set at 107 ft.

7. CASING, LINER, CURBING AND SCREEN
 Material, Weight, Specification & Method of Assembly

Dia. (in.)	From (ft.)	To (ft.)
<u>6</u>	<u>Surface</u>	<u>100</u>
		<u>107</u>

new black steel P.E. 18, 97 A-53 Kent Steel Pitless adaptor screen

10. TYPE OF DRILLING MACHINE USED

<input type="checkbox"/> Cable Tool	<input type="checkbox"/> Rotary-hammer w/drilling mud & air	<input type="checkbox"/> Jetting with
<input type="checkbox"/> Rotary-air w/drilling mud	<input checked="" type="checkbox"/> Rotary-hammer & air	<input type="checkbox"/> Air
<input type="checkbox"/> Rotary-w/drilling mud	<input type="checkbox"/> Reverse Rotary	<input type="checkbox"/> Water

8. GROUT OR OTHER SEALING MATERIAL

Kind	From (ft.)	To (ft.)
<u>loose sand</u>	<u>Surface</u>	<u>100</u>
		<u>75</u>

Well construction completed on 7-1-1978

11. MISCELLANEOUS DATA

Yield Test: 3 Hrs. at 5 GPM

Depth from surface to normal water level 60 Ft.

Depth of water level when pumping 68 Ft. Stabilized Yes No

Well is terminated 10 inches above below final grade

Well disinfected upon completion Yes No

Well sealed watertight upon completion Yes No

Water sample sent to Madison laboratory on 7-24-1978

Your opinion concerning other pollution hazards, information concerning difficulties encountered, and data relating to nearby wells, screens, seals, method of finishing the well, amount of cement used in grouting, blasting, etc., should be given on reverse side.

Signature Kenneth Coplan Registered Well Driller

Complete Mail Address Boocobal, Wis. R3 Box 84 53805

WELL CONSTRUCTOR'S REPORT TO WISCONSIN STATE BOARD OF HEALTH
See Instructions on Reverse Side

1. County Fa Crosse Wis Town Anaslaska
 Village City Check one and give name

2. Location 17 N. P. W. Section 29 E. W. 4
Name of street and number of premise or Section, Town and Range numbers

3. Owner or Agent Lyle Johnson
Name of individual, partnership or firm

4. Mail Address Anaslaska, Wis, P. F. D.
Complete address required

5. From well to nearest: Building 4 ft; sewer _____ ft; drain _____ ft; septic tank 75 ft;
 dry well or filter bed _____ ft; abandoned well _____ ft.

6. Well is intended to supply water for: Home

RECEIVED
MAY 28 1951
STANLEY BLUMENFELD

7. DRILLHOLE:

Dia. (in.)	From (ft.)	To (ft.)	Dia. (in.)	From (ft.)	To (ft.)
4"	0	129			

8. CASING AND LINER PIPE OR CURBING:

Dia. (in.)	Kind	From (ft.)	To (ft.)
4"	Blk Pipe	0	129

9. GROUT:

Kind	From (ft.)	To (ft.)
<u>None</u>		

11. MISCELLANEOUS DATA:

Yield test: 7 Hrs. at 10 GPM.
 Depth from surface to water-level: 85 ft.
 Water-level when pumping: 90 ft.
 Water sample was sent to the state laboratory at:
Fa Crosse on May 21 1951
City

10. FORMATIONS:

Kind	From (ft.)	To (ft.)
Topsoil (sandy)	0	2
Sand	2	60
Sand + Gravel	60	129'

Construction of the well was completed on: May 1951

The well is terminated 18 inches
 above, below the permanent ground surface.

Was the well disinfected upon completion?
 Yes _____ No

Was the well sealed watertight upon completion?
 Yes No _____

Signature Henry Wick Registered Well Driller 116 So 4 St Fa Crosse Wis Complete Mail Address

Please do not write in space below

Rec'd MAY 21 1951 No. 2654

Ans'd _____

Interpretation Safe

	10 ml	10 ml	10 ml	10 ml	10 ml
Gas—24 hrs.	0	0	0	0	0
48 hrs.	0	0	0	0	0
Confirm					

B. Coli _____

STATE COOPERATIVE LABORATORY
CITY HALL, LA CROSSE, WIS.

WELL CONSTRUCTOR'S REPORT
FORM 3300-15

DEC 13 1973

STATE OF WISCONSIN
DEPARTMENT OF NATURAL RESOURCES
Box 450
Madison, Wisconsin 53701

NOTE

WHITE COPY - DIVISION'S COPY
GREEN COPY - DRILLER'S COPY
YELLOW COPY - OWNER'S COPY

1. COUNTY La Crosse CHECK ONE Town Village City NAME Emilasha

2. LOCATION - 1/4 Section SW Section 29 Township 17N Range 7W 3. OWNER AT TIME OF DRILLING Earl Halley

OR - Grid or street no. Street name ADDRESS P.O. Box

AND - If available subdivision name, lot & block no. POST OFFICE Hahmen, Wis.

4. Distance in feet from well to nearest:

BUILDING	SANITARY SEWER C. I.	SEWER TILE	FLOOR DRAIN C. I.	FLOOR DRAIN TILE	FOUNDATION DRAIN SEWER CONNECTED	FOUNDATION DRAIN INDEPENDENT	WASTE WATER DRAIN C. I.	WASTE WATER DRAIN TILE
<u>6</u>	<u>-</u>	<u>-</u>	<u>-</u>	<u>-</u>	<u>-</u>	<u>-</u>	<u>-</u>	<u>-</u>

(Record answer in appropriate block)

CLEAR WATER DRAIN C. I.	CLEAR WATER DRAIN TILE	SEPTIC TANK	PRIVY	SEEPAGE PIT	ABSORPTION FIELD	BARN	SILO	ABANDONED WELL	SINK HOLE
<u>-</u>	<u>-</u>	<u>-</u>	<u>-</u>	<u>-</u>	<u>-</u>	<u>-</u>	<u>-</u>	<u>-</u>	<u>-</u>

OTHER POLLUTION SOURCES (Give description such as dump, quarry, drainage well, stream, pond, lake, etc.) None

5. Well is intended to supply water for: Home

6. DRILLHOLE						9. FORMATIONS		
Dia. (in.)	From (ft.)	To (ft.)	Dia. (in.)	From (ft.)	To (ft.)	Kind	From (ft.)	To (ft.)
<u>4</u>	<u>Surface</u>	<u>125</u>	<u>2</u>	<u>125</u>	<u>130</u>	<u>Sand & Gravel</u>	<u>Surface</u>	<u>130</u>

7. CASING, LINER, CURBING, AND SCREEN				
Dia. (in.)	Kind and Weight	From (ft.)	To (ft.)	
<u>4</u>	<u>new 4" galv 7' x 1/2" steel 11' x 1/2" per 700'</u>	<u>Surface</u>	<u>125</u>	
<u>2</u>	<u>standard steel screen</u>	<u>125</u>	<u>130</u>	

8. GROUT OR OTHER SEALING MATERIAL

Kind	From (ft.)	To (ft.)
<u>Surface</u>		

10. TYPE OF DRILLING MACHINE USED

Cable Tool Direct Rotary Reverse Rotary

Rotary - air w/drilling mud Rotary - hammer with drilling mud & air Jetting with Air Water

Well construction completed on 8-22- 1973

11. MISCELLANEOUS DATA

Yield test: 3 Hrs. at 20 GPM

Depth from surface to normal water level 95 ft.

Depth to water level when pumping 115 ft.

Well is terminated 18 inches above below final grade

Well disinfected upon completion Yes No

Well sealed watertight upon completion Yes No

Water sample sent to La Crosse laboratory on: Sept 5 1973

Your opinion concerning other pollution hazards, information concerning difficulties encountered, and data relating to nearby wells, screens, seals, type of casing joints, method of finishing the well, amount of cement used in grouting, blasting, sub-surface pumphrooms, access pits, etc., should be given on reverse side.

SIGNATURE Ray C. Cinner Registered Well Driller COMPLETE MAIL ADDRESS Rt. 2 Hahmen, Wis.

Please do not write in space below

COLIFORM TEST RESULT	GAS - 24 HRS.	GAS - 48 HRS.	CONFIRMED	REMARKS
----------------------	---------------	---------------	-----------	---------